


K-L-MEHRFACHVERT 3 DR AGR OR

Multiple union elbows with inner hex, 3 outlets, swivel type, parallel male thread with O-ring

HANSA FLEX

Caratteristiche

| | |
|------------------------------------|--|
| Pressione di lavoro | Max. 15 bar, coarse vacuum |
| Campo di impiego | Air, vacuum |
| Tubi flessibili consigliati | PU or PA (nylon) |
| Mezzi | Compressed air and all gases or liquids that are compatible with the materials |
| Campo della temperatura: | -20 °C to +80 °C |
| Superficie di tenuta | Parallel version: O-ring in housing |
| Materiale | Plastic, Nickel plated brass |
| Anello di compressione | Plastic |

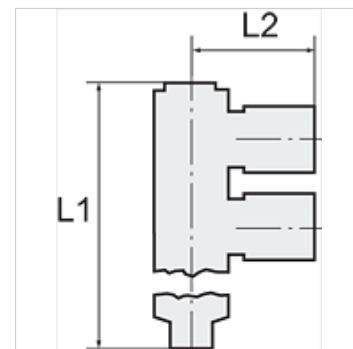

Nota

Altri dati su richiesta.

Descrizione

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

Articolo

| Denominazione | Filetto | per diametro esterno del tubo flessibile Ø mm | Esagono cavo (mm) | L1 (mm) | L2 (mm) | SW |
|----------------|---------|---|-------------------|---------|---------|-------|
| K- 07 40 06 11 | G 1/8 | 4 mm | 4,0 | 59,1 | 22,5 | 14 mm |
| K- 07 40 06 12 | G 1/8 | 6 mm | 4,0 | 59,1 | 21,5 | 14 mm |
| K- 07 40 06 13 | G 1/8 | 8 mm | 4,0 | 59,1 | 24,5 | 14 mm |
| K- 07 40 06 09 | G 1/4 | 6 mm | 6,0 | 79,5 | 23,5 | 17 mm |
| K- 07 40 06 10 | G 1/4 | 8 mm | 6,0 | 79,5 | 26,5 | 17 mm |
| K- 07 40 06 07 | G 1/4 | 10 mm | 6,0 | 79,5 | 29,9 | 17 mm |
| K- 07 40 06 08 | G 1/4 | 12 mm | 6,0 | 79,5 | 30,8 | 17 mm |
| K- 07 40 06 16 | G 3/8 | 8 mm | 8,0 | 82,2 | 28,5 | 20 mm |
| K- 07 40 06 14 | G 3/8 | 10 mm | 8,0 | 82,2 | 31,9 | 20 mm |
| K- 07 40 06 15 | G 3/8 | 12 mm | 8,0 | 82,2 | 32,8 | 20 mm |