
# K-L-RINGSTUECK1

L-ring nipples

## Caratteristiche

| | |
|---|---|
| **Pressione di lavoro** | Max. 16 bar |
| **Temperatura d'esercizio** | -20 °C to +70°C |
| **Materiale** | Ottone nichelato |
| **Anello di compressione** | Hostaform |
| **Anello elastico** | Stainless steel |



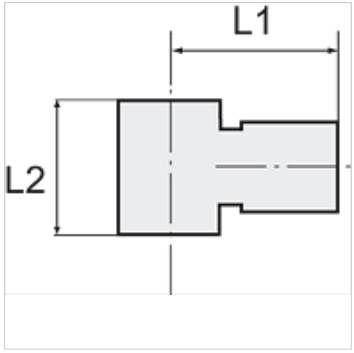


## Nota

Altri dati su richiesta.

## Descrizione

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

## Articolo

| Denominazione | per vite cava | per diametro esterno del tubo flessibile Ø mm | L1 (mm) | L2 (mm) |
|---|---|---|---|---|
| **K- 07 40 26 82** | M 5 | 4 mm | 18,0 | 9,0 |
| **K- 07 40 26 87** | G 1/8 | 4 mm | 20,5 | 15,0 |
| **K- 07 40 26 88** | G 1/8 | 6 mm | 23,0 | 15,0 |
| **K- 07 40 26 89** | G 1/8 | 8 mm | 24,5 | 15,0 |
| **K- 07 40 26 85** | G 1/4 | 6 mm | 24,0 | 17,0 |
| **K- 07 40 26 86** | G 1/4 | 8 mm | 26,0 | 17,0 |
| **K- 07 40 26 83** | G 1/4 | 10 mm | 27,0 | 17,0 |
| **K- 07 40 26 84** | G 1/4 | 12 mm | 28,0 | 17,0 |
| **K- 07 40 26 92** | G 3/8 | 8 mm | 27,0 | 20,0 |
| **K- 07 40 26 90** | G 3/8 | 10 mm | 28,0 | 20,0 |
| **K- 07 40 26 91** | G 3/8 | 12 mm | 29,0 | 20,0 |

*Nonostante il più attento esame non si possono escludere eventuali errori ed omissioni, non ci assumiamo alcuna responsabilità per le indicazioni contenute.*