



# K-STECKVERSCHR RU AGR-K

Male connectors, round, conical male thread, coated with inner hex

**HANSA FLEX**

## Caratteristiche

<b>Pressione di lavoro</b>	Max. 15 bar, coarse vacuum
<b>Campo di impiego</b>	Air, vacuum
<b>Tubi flessibili consigliati</b>	PU or PA (nylon)
<b>Mezzi</b>	Compressed air and all gases or liquids that are compatible with the materials
<b>Campo della temperatura:</b>	-20 °C to +80 °C
<b>Superficie di tenuta</b>	Conical version: thread coating
<b>Materiale</b>	Plastic, Nickel plated brass
<b>Anello di compressione</b>	Plastic

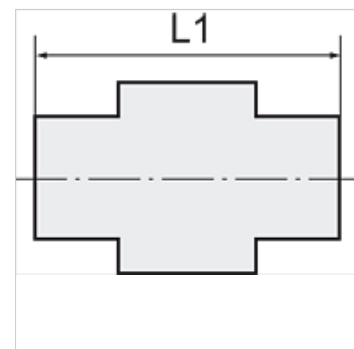

## Nota

Altri dati su richiesta.

## Descrizione

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

## Articolo

Denominazione	Filetto	per diametro esterno del tubo flessibile Ø mm	Esagono cavo (mm)	L1 (mm)
K- 07 40 09 38	R 1/8	4 mm	3,0	19,8
K- 07 40 09 39	R 1/8	6 mm	4,0	20,7
K- 07 40 09 40	R 1/8	8 mm	5,0	27,1
K- 07 40 09 37	R 1/8	10 mm	5,0	29,6
K- 07 40 09 34	R 1/4	4 mm	3,0	17,9
K- 07 40 09 35	R 1/4	6 mm	4,0	22,5
K- 07 40 09 36	R 1/4	8 mm	5,0	24,6
K- 07 40 09 33	R 1/4	10 mm	6,0	30,9
K- 07 40 09 44	R 3/8	6 mm	4,0	20,1
K- 07 40 09 45	R 3/8	8 mm	6,0	24,6
K- 07 40 09 41	R 3/8	10 mm	8,0	26,9
K- 07 40 09 42	R 3/8	12 mm	8,0	29,6
K- 07 40 09 43	R 3/8	16 mm	8,0	38,1
K- 07 40 09 31	R 1/2	6 mm	4,0	24,1
K- 07 40 09 32	R 1/2	8 mm	6,0	25,6
K- 07 40 09 28	R 1/2	10 mm	8,0	25,3
K- 07 40 09 29	R 1/2	12 mm	8,0	32,6
K- 07 40 09 30	R 1/2	16 mm	10,0	35,1