


# K-T-MEHRF-VERT 6 DREH 1

Tee distributors with inner hex, 6 outlets, swivel type, parallel male thread with O-ring

**HANSA FLEX**

## Caratteristiche

|                             |                                                                                |
|-----------------------------|--------------------------------------------------------------------------------|
| Pressione di lavoro         | Max. 15 bar, coarse vacuum                                                     |
| Campo di impiego            | Air, vacuum                                                                    |
| Tubi flessibili consigliati | PU or PA (nylon)                                                               |
| Mezzi                       | Compressed air and all gases or liquids that are compatible with the materials |
| Campo della temperatura:    | -20 °C to +80 °C                                                               |
| Superficie di tenuta        | Parallel version: O-ring in housing                                            |
| Materiale                   | Plastic, Nickel plated brass                                                   |
| Anello di compressione      | Plastic                                                                        |

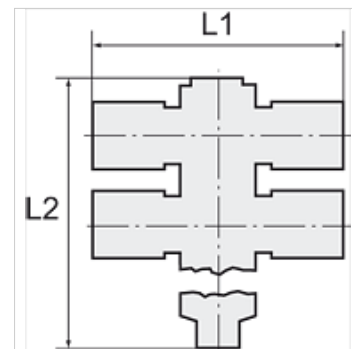

## Nota

Altri dati su richiesta.

## Descrizione

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

## Articolo

| Denominazione  | Filetto | per diametro esterno del tubo flessibile Ø mm | Esagono cavo<br>(mm) | L1<br>(mm) | L2<br>(mm) | SW    |
|----------------|---------|-----------------------------------------------|----------------------|------------|------------|-------|
| K- 07 40 06 70 | G 1/8   | 4 mm                                          | 4,0                  | 45,0       | 59,1       | 14 mm |
| K- 07 40 06 71 | G 1/8   | 6 mm                                          | 4,0                  | 42,6       | 59,1       | 14 mm |
| K- 07 40 06 72 | G 1/8   | 8 mm                                          | 4,0                  | 48,5       | 59,1       | 14 mm |
| K- 07 40 06 68 | G 1/4   | 6 mm                                          | 6,0                  | 46,7       | 80,5       | 17 mm |
| K- 07 40 06 69 | G 1/4   | 8 mm                                          | 6,0                  | 52,5       | 80,5       | 17 mm |
| K- 07 40 06 66 | G 1/4   | 10 mm                                         | 6,0                  | 59,6       | 80,5       | 17 mm |
| K- 07 40 06 67 | G 1/4   | 12 mm                                         | 6,0                  | 61,2       | 80,5       | 17 mm |
| K- 07 40 06 75 | G 3/8   | 8 mm                                          | 8,0                  | 56,7       | 82,2       | 20 mm |
| K- 07 40 06 73 | G 3/8   | 10 mm                                         | 8,0                  | 63,5       | 82,2       | 20 mm |
| K- 07 40 06 74 | G 3/8   | 12 mm                                         | 8,0                  | 64,9       | 82,2       | 20 mm |