
K-L-STECK VB
Union elbows

Caratteristiche

Pressione di lavoro	Max. 16 bar
Temperatura d'esercizio	-20 °C to +150 °C
Materiale	Ottone nichelato
Anello di compressione	Nickel-plated brass
Anello elastico	Stainless steel



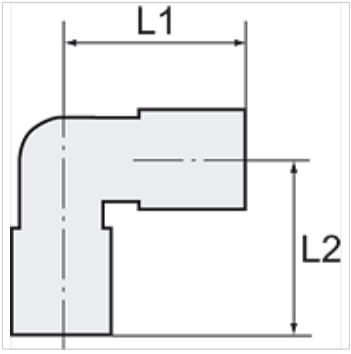

Nota
Altri dati su richiesta.

Descrizione
Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring.
All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

Articolo

Denominazione	per diametro esterno del tubo flessibile Ø mm	L1 (mm)	L2 (mm)
K- 07 40 27 53	4 mm	17,5	17,5
K- 07 40 27 54	6 mm	20,0	20,0
K- 07 40 27 55	8 mm	23,0	23,0
K- 07 40 27 56	10 mm	25,0	25,0
K- 07 40 47 79	12 mm	27,5	27,5
K- 07 40 47 80	14 mm	31,0	31,0

Nonostante il più attento esame non si possono escludere eventuali errori ed omissioni, non ci assumiamo alcuna responsabilità per le indicazioni contenute.