# K-SCHOTT-STECKVERB 2

Female bulkhead connectors

## Caratteristiche

| | |
|---|---|
| **Pressione di lavoro** | Max. 16 bar |
| **Temperatura d'esercizio** | -20 °C to +150 °C |
| **Materiale** | Ottone nichelato |
| **Anello di compressione** | Nickel-plated brass |
| **Anello elastico** | Stainless steel |



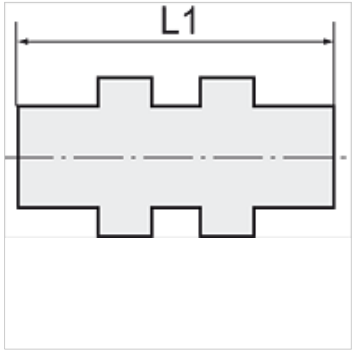


## Nota

Altri dati su richiesta.

## Descrizione

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring.<br>All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

## Articolo

| Denominazione | Filetto | per diametro esterno del tubo flessibile Ø mm | L1 (mm) | SW |
|---|---|---|---|---|
| **K- 07 40 27 61** | M 10 x 1 | 4 mm | 31,5 | 13 mm |
| **K- 07 40 27 62** | M 14 x 1 | 6 mm | 33,5 | 17 mm |
| **K- 07 40 27 63** | M 16 x 1 | 8 mm | 37,0 | 18 mm |
| **K- 07 40 27 64** | M 17 x 1 | 10 mm | 39,5 | 20 mm |
| **K- 07 40 47 83** | M 20 x 1 | 12 mm | 42,0 | 24 mm |
| **K- 07 40 47 84** | M 22 x 1 | 14 mm | 46,0 | 25 mm |

*Nonostante il più attento esame non si possono escludere eventuali errori ed omissioni, non ci assumiamo alcuna responsabilità per le indicazioni contenute.*