

K-T-STECK VERS DRE AG OR

Male branch tees, swivel type, parallel male thread with O-ring

Caratteristiche

Pressione di lavoro	Max. 16 bar
Temperatura d'esercizio	-20 °C to +150 °C
Materiale	Ottone nichelato
Anello di compressione	Nickel-plated brass
O-ring	FKM (FPM)
Anello elastico	Stainless steel



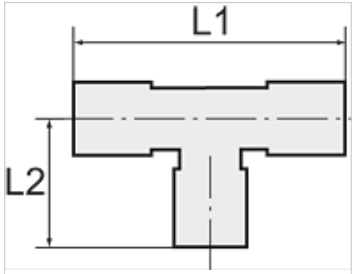

Nota

Altri dati su richiesta.

Descrizione

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring.
All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

Articolo

Denominazione	Filetto	per diametro esterno del tubo flessibile Ø mm	L1 (mm)	L2 (mm)	SW
K- 07 40 27 80	G 1/8	4 mm	40,0	20,0	13 mm
K- 07 40 27 81	G 1/8	6 mm	43,0	20,0	13 mm
K- 07 40 27 82	G 1/8	8 mm	47,0	20,0	13 mm
K- 07 40 27 78	G 1/4	6 mm	43,0	24,0	13 mm
K- 07 40 27 79	G 1/4	8 mm	47,0	24,0	13 mm
K- 07 40 27 77	G 1/4	10 mm	53,0	24,0	16 mm
K- 07 40 27 84	G 3/8	8 mm	47,0	25,5	13 mm
K- 07 40 27 83	G 3/8	10 mm	53,0	28,0	16 mm
K- 07 40 47 89	G 3/8	12 mm	58,0	28,5	20 mm
K- 07 40 47 88	G 1/2	12 mm	58,0	33,5	20 mm

Nonostante il più attento esame non si possono escludere eventuali errori ed omissioni, non ci assumiamo alcuna responsabilità per le indicazioni contenute.