


K-VERBINDER 4

Unions

HANSA FLEX

Caratteristiche

Pressione d'esercizio	Max. 16 bar (at +20 °C)
Temperatura d'esercizio	-20 °C to +70 °C
Materiale	Ottone nichelato
Anello di compressione	Hostaform (black nickel-plated for Ø 10, 12)
O-ring	NBR, siliconefree
Pinza a trazione	Stainless steel AISI 316

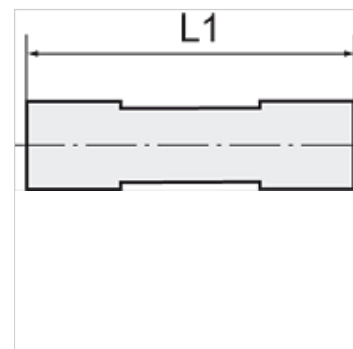

Nota

Altri dati su richiesta.

Descrizione

Economy yet very high-quality series of push-in fittings made of nickel-plated brass. Compact, space-saving, lightweight design. An O-ring in the fillet at the end of the thread guarantees a tight connection for all male thread parts, even on rough surfaces.

Articolo

Denominazione	per diametro esterno del tubo flessibile Ø mm	L1 (mm)
K- 07 40 29 42	4 mm	31,0
K- 07 40 29 43	6 mm	33,5
K- 07 40 29 44	8 mm	38,0
K- 07 40 29 45	10 mm	39,5
K- 07 40 29 46	12 mm	43,0