



K-EST 12 MS

Male stems for coupling NW12 MS

HANSA FLEX

Caratteristiche

| | |
|------------------------|---------------------------------|
| Pressione di lavoro | 10 bar |
| Temperatura del fluido | max. +90 °C |
| Temperatura ambiente | Max. +90 °C |
| Materiale | Brass with a bare metal surface |

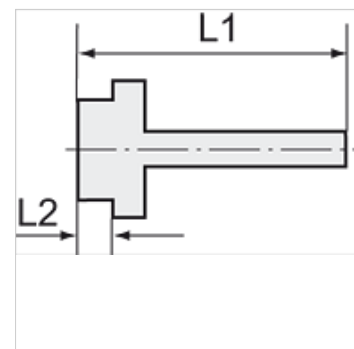

Nota

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
Altri dati su richiesta.

Informazioni supplementari

Further types and dimensions on request.

Articolo

| Denominazione | Filetto | per flessibile | L1 (mm) | L2 (mm) | SW |
|----------------|---------|----------------|------------|------------|-------|
| K- 07 35 00 88 | G 1/2 | LW 16 mm | 58,0 | 10,0 | 20 mm |