

# K-TUE IG ES



Female hose fittings with female thread stainless steel

**HANSA FLEX**

## Caratteristiche

Pressione di lavoro Max. 20 bar

Materiale Acciaio inossidabile 1.4571

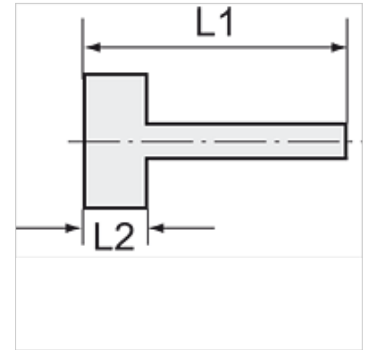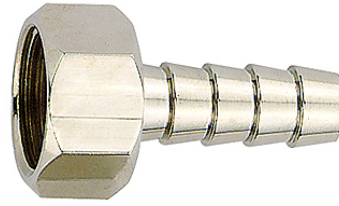

## Nota

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.  
Altri dati su richiesta.

## Informazioni supplementari

Further types and dimensions on request.

## Articolo

| Denominazione  | Filetto | per flessibile | L1<br>(mm) | L2<br>(mm) | SW    |
|----------------|---------|----------------|------------|------------|-------|
| K- 07 40 13 30 | G 1/8   | LW 6 mm        | 35,0       | 10,0       | 12 mm |
| K- 07 40 13 31 | G 1/8   | LW 8 mm        | 35,0       | 10,0       | 12 mm |
| K- 07 40 13 32 | G 1/4   | LW 6 mm        | 36,0       | 11,0       | 17 mm |
| K- 07 40 13 33 | G 1/4   | LW 8 mm        | 36,0       | 11,0       | 17 mm |
| K- 07 40 13 34 | G 1/4   | LW 10 mm       | 36,0       | 11,0       | 17 mm |
| K- 07 40 13 35 | G 1/4   | LW 13 mm       | 40,5       | 11,0       | 17 mm |
| K- 07 40 13 36 | G 3/8   | LW 6 mm        | 36,0       | 11,0       | 19 mm |
| K- 07 40 13 37 | G 3/8   | LW 8 mm        | 36,0       | 11,0       | 19 mm |
| K- 07 40 13 38 | G 3/8   | LW 10 mm       | 36,0       | 11,0       | 19 mm |
| K- 07 40 13 39 | G 3/8   | LW 13 mm       | 40,5       | 11,0       | 19 mm |
| K- 07 40 13 40 | G 1/2   | LW 6 mm        | 39,0       | 14,5       | 24 mm |
| K- 07 40 13 41 | G 1/2   | LW 8 mm        | 39,0       | 14,5       | 24 mm |
| K- 07 40 13 42 | G 1/2   | LW 10 mm       | 39,0       | 14,5       | 24 mm |
| K- 07 40 13 43 | G 1/2   | LW 13 mm       | 44,0       | 14,5       | 24 mm |