

K-W90 VERBINDER MS NI

Union elbows


HANSA FLEX

Caratteristiche

Pressione di lavoro Max. 18 bar

Materiale di tenuta Buna-N

Materiale Ottone nichelato

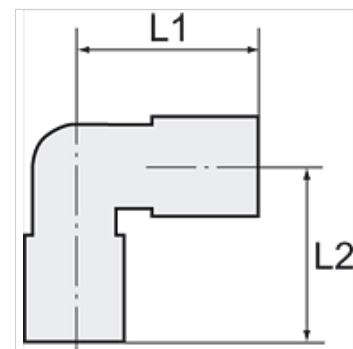

Nota

Altri dati su richiesta.

Articolo

Denominazione	per flessibile	L1 (mm)	SW
K- 07 40 31 77	4 mm / 2 mm	24,5	9 mm
K- 07 40 31 78	5 mm / 3 mm	21,5	8 mm
K- 07 40 31 79	6 mm / 4 mm	22,0	9 mm
K- 07 40 31 80	8 mm / 6 mm	22,0	12 mm
K- 07 40 31 75	10 mm / 8 mm	25,0	12 mm
K- 07 40 31 76	12 mm / 10 mm	30,0	14 mm