


### Caratteristiche

Esecuzione	Tenuta a sfera sbloccabile - ad effetto doppio
Materiale	Corpo: Acciaio zincato Parti interne in acciaio
Pressione d'esercizio	max. 500 bar

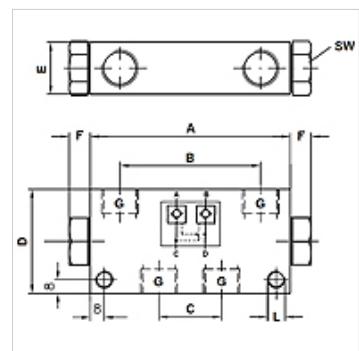

### Articolo

Denominazione	p max. (bar)	Rapporti dei comandi	Q max. (L/min)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	G	L (mm)	SW (mm)	Peso (kg)
<b>HK DRH 1</b>	500	1:2,5	16	70	50	28,0	45	20	G 1/4"	6	19	0,50
<b>HK DRH 2</b>	500	1:2,5	30	89	63	36,0	60	30	G 3/8"	8	22	1,20
<b>HK DRH 3</b>	500	1:2,5	60	115	81	36,0	60	30	G 1/2"	10	27	1,60
<b>HK DRH 4</b>	400	1:2,5	90	150	106	55,0	70	40	G 3/4"	10	32	2,90