


## Savybės

|              |                                 |
|--------------|---------------------------------|
| Konstrukcija | Minkštasis tarpiklis            |
| Norma        | DIN EN ISO 9474-2<br>ISO 1179-2 |
| Medžiaga     | NBR                             |

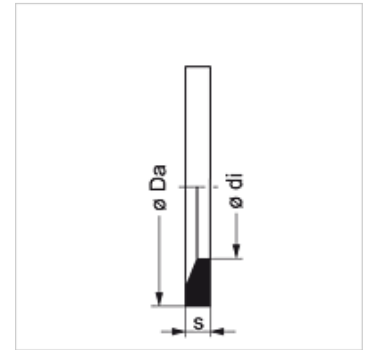

## Prekė

| Pavadinimas    | sriegiui   | sriegiui | Ø Da<br>(mm) | Ø di<br>(mm) | S<br>(mm) |
|----------------|------------|----------|--------------|--------------|-----------|
| WD 8-1         | M 8 x 1    | -        | 9,9          | 6,5          | 1,0       |
| WD 10-1 R1/8   | M 10 x 1   | G 1/8"   | 11,9         | 8,4          | 1,0       |
| WD 12-1.5      | M 12 x 1,5 | -        | 14,4         | 9,8          | 1,5       |
| WD 14-1.5 R1/4 | M 14 x 1,5 | G 1/4"   | 16,5         | 11,6         | 1,5       |
| WD 16-1.5      | M 16 x 1,5 | -        | 18,9         | 13,8         | 1,5       |
| WD R3/8        | -          | G 3/8"   | 18,9         | 14,7         | 1,5       |
| WD 18-1.5      | M 18 x 1,5 | -        | 20,9         | 15,7         | 1,5       |
| WD 20-1.5      | M 20 x 1,5 | -        | 22,9         | 17,8         | 1,5       |
| WD R1/2        | -          | G 1/2"   | 23,9         | 18,5         | 1,5       |
| WD 22-1.5      | M 22 x 1,5 | -        | 24,3         | 19,6         | 1,5       |
| WD 26-27-R3/4  | M 26 x 1,5 | G 3/4"   | 29,2         | 23,9         | 1,5       |
| WD 33-2 R 1    | M 33 x 2   | G 1"     | 35,7         | 29,7         | 2,0       |
| WD 42-2 R1 1/4 | M 42 x 2   | G 1.1/4" | 45,8         | 38,8         | 2,0       |
| WD 48-2 R1 1/2 | M 48 x 2   | G 1.1/2" | 50,7         | 44,7         | 2,0       |
| WD R2          | -          | G 2"     | 66,0         | 56,0         | 4,0       |

## Gaminių variantai

|      |                                       |
|------|---------------------------------------|
| WD V | Minkštasis tarpiklis JIC, FPM (Viton) |
|------|---------------------------------------|