

HK GEH ZP16 DB ST

ZP NG16 vožtuvu korp. redukciniam SAE 2-eigiam plien. vožtuvui


HANSA FLEX

Savybės

Sandinimo forma Sandarinimo žiedo tarpiklis

Medžiaga Plienas

Darbinis slėgis maks. 350 bar

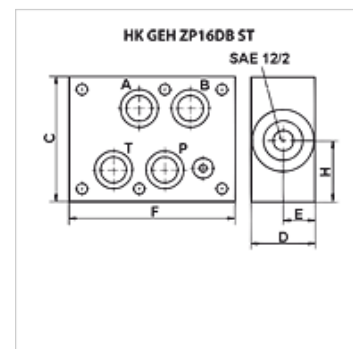

Prekė

| Pavadinimas | Jungtis | C (mm) | D (mm) | E (mm) | F (mm) | H (mm) | veikia kanale | vožtuvu tipui | Svoris (kg) |
|----------------------|----------------|-----------|-----------|-----------|-----------|-----------|---------------|---------------------------------------|----------------|
| HK GEH ZP16 DB 12 AT | Cetop 07 NG 16 | 90 | 40 | 20 | 120 | 45 | A + T | HKRVPS12NS0 - SAE12/2 1 1/16-12UNF-2B | 3,4 |
| HK GEH ZP16 DB 12 PT | Cetop 07 NG 16 | 90 | 40 | 20 | 120 | 45 | P + T | HKRVPS12NS0 - SAE12/2 1 1/16-12UNF-2B | 3,4 |