



HK GEH 30 GGG

Įsukamo SAE 3-eigio aliuminio vožtuvo GGG40 korpusas

HANSA FLEX

Savybės

Medžiaga	GGG 40
Darbinis slėgis	maks. 350 bar
Paviršiaus apsauga	cinkuotas

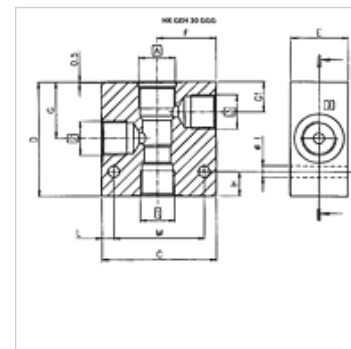

Prekė

Pavadinimas	Vožtuvo skylė	A	1,3 jungtys	3 jungtys	C	D	E	F	G	G1	H	I	L	M	Svoris
					(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
HK GEH 38 C0830 GGG	C0830	UNF 3/4" -16	G 3/8"	G 3/8"	60	65	29	30,0	29,5	15,0	15	7	7,5	44	0,6
HK GEH 38 C1030 GGG	C1030	UNF 7/8" -14	G 3/8"	G 3/8"	70	75	39	35,5	34,5	18,5	15	7	7,5	54	1,2
HK GEH 12 C1230 GGG	C1230	UNF 1.1/16" 12	G 3/4"	G 1/2"	80	100	39	40,0	53,5	28,5	18	9	10,0	59	1,7

priedai šiems gaminiams

HK BFCV	3-eigis srovės reguliavimo vožtuvas BFCV
HK PRRS	3-eigis redukcinis vožtuvas, PRRS