

K-DICHTRINGE ALU


Sealing rings, aluminium, max. temperature 250 °C

HANSA FLEX

Savybės

Temperatūra Max. +250 °C

Medžiaga Aliuminis

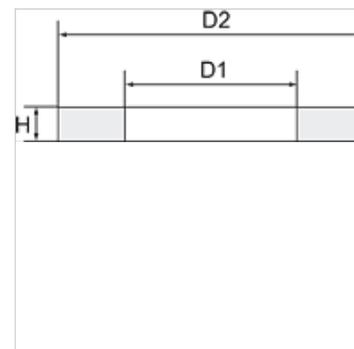

Nuoroda

Daugiau duomenų pagal užklausimą.

užsakymo nuorodos

All seals are only sold in packaging units of 100 x. Tolerances refer to data sheets.

Prekė

Pavadinimas	sriegiui	D1 (mm)	D2 (mm)	H (mm)
K- 07 10 03 02	M 5	5,1	8,0	1,0
K- 07 10 03 06	G 1/2	21,0	28,0	1,5
K- 07 10 03 04	G 1/4	13,3	18,0	1,5
K- 07 10 03 05	G 3/8	17,0	21,8	1,5
K- 07 10 03 08	G 1	33,3	38,9	2,0
K- 07 10 03 07	G 3/4	26,5	33,0	2,0
K- 07 10 03 03	G 1/8	10,0	13,8	1,5