K-GRUNDEJEKTION SBP


Basic ejectors

HANSA-FLEX

Savybės

Savybės	Vacuum generator without control valves or system monitoring functions, with a high maximum vacuum value (85%) No moving parts, which means no wear and no maintenance Maximum suction capacity with minimum compressed air consumption Minimum size, low weight For decentralised vacuum generation in highly dynamic processes
Panaudojimas	For universal use in lightweight gripper systems to handle air-tight workpieces as well as for automatic separation systems, e.g. in the plastics, electronics and packaging industries. Also ideal for the construction of ejector blocks for decentralised control of suction pads.
Korpusas	Plastic (impact-resistant)
Jungtis	Push-in coupling
Darbinis slėgis	4.5 bar
Evakuacijos lygis	85 %
Garso slopintuvas	Plastic



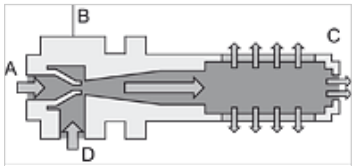

Nuoroda

Daugiau duomenų pagal užklausimą.

Aprašas

Purely pneumatic vacuum ejector that operates on the Venturi principle. Compressed air enters the ejector at A and flows through the nozzle B. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet D. This air and the driving air leave the ejector via the silencer C.

Prekė

Pavadinimas	Purkštuko dydis	Suslėgtojo oro jungtis	Vakuumo jungtis	Siurbimo oro sąnaudos (L/min)	maks. siurbimo pajėgumas (L/min)	Matmuo
K- 07 45 01 13	0,5	4 mm	4 mm	14,0	8,0	71mm x 10mm x 28mm
K- 07 45 01 14	0,7	4 mm	4 mm	22,0	16,0	71mm x 10mm x 28mm
K- 07 45 01 15	1,0	6 mm	8 mm	48,0	37,7	97mm x 15mm x 40mm
K- 07 45 01 16	1,5	6 mm	8 mm	105,0	71,0	97mm x 15mm x 40mm
K- 07 45 01 17	2,0	8 mm	10 mm	197,0	127,0	168mm x 20mm x 46mm
K- 07 45 01 18	2,5	8 mm	10 mm	311,0	215,0	168mm x 20mm x 46mm

Priedai

K-GRUNDPLATTEN 1	Base plate
K-ERSATZSCHALLDAEMPFER 3	Replacement silencers
K-ERSATZSCHALLDAEMPFER 1	Replacement silencers

Nepaisant kruopštaus patikrinimo, negalime atmesti klaidų tikimybės, todėl už esamus duomenis neatsakome.