K-GRUNDEJEKTION SBP-C


Basic ejectors »SBP-C« with blow-off valve, with integrated silencer

HANSA-FLEX

Savybės

Savybės	Vacuum generator with a single nozzle, available in six power ratings, with a high maximum vacuum value (85%) Connection of compressed air and vacuum with push-in coupling Basic housing with connection facility for a vacuum switch Maximum suction capacity with minimum compressed air consumption Minimum size, low weight Various power ratings for optimised air consumption
Panaudojimas	For universal use in handling systems with very high dynamic movements Handling all kinds of air-tight components For use in separation systems where space is restricted. \nConstruction of ejector blocks for centralised or decentralised individual control of suction pads.
Purkštukų sistema	Brass
Jungtis	Push-in coupling
Garso slopintuvas	Plastic
Pagrindinis korpusas	Impact-resistant plastic



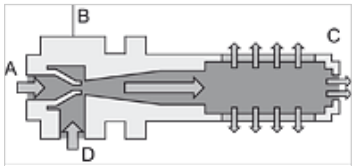

Nuoroda

Daugiau duomenų pagal užklausimą.

Aprašas

Purely pneumatic vacuum ejector that operates on the Venturi principle. Compressed air enters the ejector at A and flows through the nozzle B. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet D. This air and the driving air leave the ejector via the silencer C.

Prekė

Pavadinimas	Purkštuko dydis	Siurbiamojo vožtuvo rimties padėtis	Suslėgtojo oro jungtis	Vakuumo jungtis	Matmuo
K- 07 45 01 19	1,0	NO	6 mm	8 mm	142mm x 15mm x 50mm
K- 07 45 01 21	1,5	NO	6 mm	8 mm	142mm x 15mm x 50mm
K- 07 45 01 23	2,0	NO	8 mm	10 mm	228mm x 20mm x 72mm
K- 07 45 01 25	2,5	NO	8 mm	10 mm	228mm x 20mm x 72mm

Priedai

K-ERSATZSCHALLDAEMPFER 1	Replacement silencers
K-GRUNDPLATTEN 1	Base plate
K-BEFESTIGUNGSSAETZE 1	Mounting kit