

K-INLINE-EJEKTOREN VR

Inline ejectors »VR«, screw connection

HANSA FLEX

Savybės


Savybės Vacuum generator with high maximum vacuum level (85% vacuum)
No moving parts, which means no wear and no maintenance
ultra small footprint, suitable for confined spaces
minimal air consumption
low noise

Panaudojimas by screwing / plugging into the distribution beam
direct attachment to the suction pad
for handling various workpieces

Korpusas Aluminium eloxed (type VR)

Purkštukų sistema Brass (type VR)

Jungtis Kištukinė jungtis

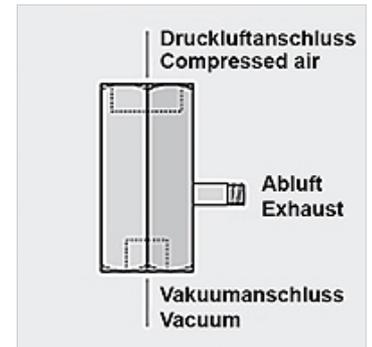

Nuoroda

Daugiau duomenų pagal užklausimą.

Aprašas

For vacuum generation directly at the point of use. For direct installation between the suction pad and the compressed air supply. Purely pneumatic vacuum generator that operates on the Venturi principle. Compressed air enters the ejector and flows through a nozzle. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet. This air and the driving air leave the ejector and enter the atmosphere via the exhaust air outlet.

Prekė

| Pavadinimas | Purkštuko dydis | Oro išleidimo jungtis | Suslėgtojo oro jungtis | Vakuumo jungtis | Evakuacijos lygis | Siurbimo oro sąnaudos (L/min) | maks. siurbimo pajėgumas (L/min) | Ilgis (mm) | Darbinis slėgis (bar) |
|----------------|-----------------|-----------------------|------------------------|-----------------|-------------------|-------------------------------|----------------------------------|------------|-----------------------|
| K- 07 45 01 29 | 0,7 | M 5 male | G 1/4 IG | G1/8 female | 90 % | 21,0 | 14,0 | 35,0 | 5,0 |
| K- 07 45 01 30 | 0,9 | M 5 male | G 1/4 IG | G1/8 female | 89 % | 36,0 | 21,0 | 35,0 | 5,0 |