
K-INLINE-EJEKTTOREN VR

Inline ejectors »VR«, screw connection

Savybės

Savybės	Vacuum generator with high maximum vacuum level (85% vacuum) No moving parts, which means no wear and no maintenance ultra small footprint, suitable for confined spaces minimal air consumption \nlow noise
Panaudojimas	by screwing / plugging into the distribution beam direct attachment to the suction pad for handling various workpieces
Korpusas	Aluminium eloxed (type VR)
Purkštukų sistema	Brass (type VR)
Jungtis	Kištukinė jungtis



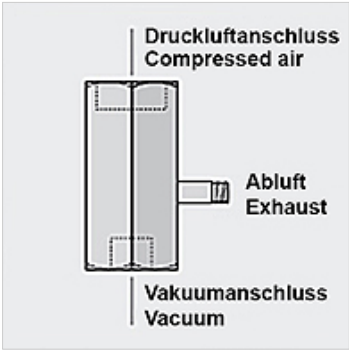

Nuoroda

Daugiau duomenų pagal užklausimą.

Aprašas

For vacuum generation directly at the point of use. For direct installation between the suction pad and the compressed air supply. Purely pneumatic vacuum generator that operates on the Venturi principle. Compressed air enters the ejector and flows through a nozzle. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet. This air and the driving air leave the ejector and enter the atmosphere via the exhaust air outlet.

Prekė

Pavadinimas	Purkštuko dydis	Oro išleidimo jungtis	Suslėgtojo oro jungtis	Vakuumo jungtis	Evakuacijos lygis	Siurbimo oro sąnaudos (L/min)	maks. siurbimo pajėgumas (L/min)	Ilgis (mm)	Darbinis slėgis (bar)
K- 07 45 01 29	0,7	M 5 male	G 1/4 IG	G1/8 female	90 %	21,0	14,0	35,0	5,0
K- 07 45 01 30	0,9	M 5 male	G 1/4 IG	G1/8 female	89 %	36,0	21,0	35,0	5,0

Nepaisant kruopštaus patikrinimo, negalime atmesti klaidų tikimybės, todėl už esamus duomenis neatsakome.