

K-KOMPAKTEJEKTOREN MINI

Mini-compact ejectors

HANSA FLEX

Savybės


Savybės Vacuum generator with integrated control valves and system monitoring functions
Gripping and blowing off can be controlled without the need for external valves
Optimised air consumption thanks to many models with differing suction capacities
Minimum energy costs in continuous operation
Easy adjustment with foil keypad, LED display of the settings
Minimum size and low weight
Optimum vacuum generation directly on the suction pad
Complete solution for very simple installation
Short learning curve thanks to "teach" function
No need for additional sensors
Easily visible status indication

Panaudojimas Ideal where space is restricted and for highly dynamic movements, handling with industrial robots, linear axes pick-and-place systems

Evakuacijos lygis 85 %

Pagrindinis korpusas Anodised aluminium

Integruotas NC blow-off valve, filter, silencer, non-return valve

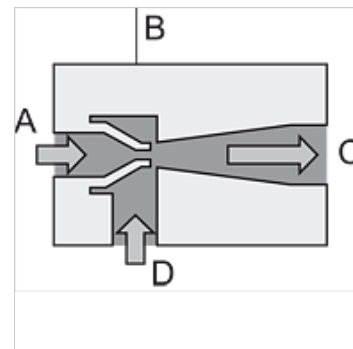

Nuoroda

Mini-sensor with housing and connection cable, analogue or digital output signal. Minimum size and low weight combined with high measuring accuracy. Daugiau duomenų pagal užklausimą.

Aprašas

Purely pneumatic vacuum generator that operates on the Venturi principle. Compressed air enters the ejector at A and flows through the nozzle B. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet D. This air and the driving air leave the ejector via the silencer C.

Papildoma informacija

Important: Order two connection plugs per ejector.

Prekė

Pavadinimas	Purkštuko dydis	Siurbiamojo vožtuvo rimties padėtis	Suslėgtojo oro jungtis	Vakuumo jungtis	Siurbimo oro sąnaudos (L/min)	maks. siurbimo pajėgumas (L/min)	Matmuo	Darbinis slėgis (bar)
K- 07 45 01 46	1,0	NC	M 5 IG	M5 female	46,0	23,0	65mm x 10mm x 107mm	4,5
K- 07 45 01 45	1,0	NO	M 5 IG	M5 female	46,0	23,0	65mm x 10mm x 107mm	4,5

Priedai

K-ANSCHLUSSTECK MAGNETVE 1	Connection plug for solenoid valves
K-ERSATZSCHALLDAEMPFER	Replacement silencers
K-ERSATZFILTERELEMENTE 1	Replacement filter element