

K-SAUGPLATTENAUFHAENGUNG


Flexible suction pad mountings

HANSA FLEX

Savybės

Panaudojimas For handling of workpieces with sloping using large-area vacuum gripper
Handling of large plates that can sag when lifting
In combination with spring plungers to compensate height-differences and Unevenness

Ypatingi požymiai very good adaptation to oblique workpiece surfaces
automatic Rückstellung in die Ausgangslage
vacuum-tight design with integrated protection against damage

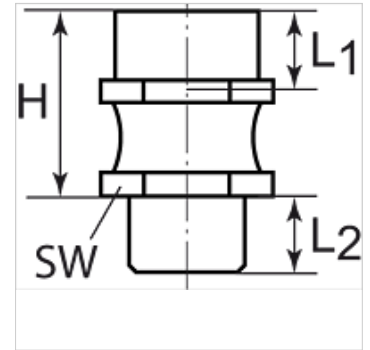

Nuoroda

Daugiau duomenų pagal užklausimą.

Aprašas

Flexible suction pad mounting. By flexing in all directions, this mounting allows the suction pad to better adapt itself to sloping workpieces.

Prekė

Pavadinimas	1 sriegiai viduje	2 sriegiai išorėje	H (mm)	Medžiaga	L1 (mm)	L2 (mm)	Kampas W (°)	Vertikaloji apkrova (N/m ²)	Lenkimo momentas (N/m ²)	SW (mm)
K- 07 45 01 47	G 1/4	M 10 x 1.25	27,0	Steel, rubber	10,5	8,0	12	500	8,0	17
K- 07 45 01 48	G 1/4	G 1/4	27,0	Steel, rubber	12,0	12,0	12	750	10,0	17