



K-DRUCKSCHALTER VAKUUM

Combined vacuum/pressure switch

HANSA FLEX

Savybės

Konstrukcija	PNP
Matavimo medžiagos jungtis	G 1/8 male and M 5 female
Histerėzė	Adjustable: 3 to 25% of set value
Temperatūros diapazonas	0 - 50 °C
Medžiagos	Non-aggressive gases. dry, oil-free air
Korpusas	Polycarbonate
Išėjimo signalas	Analogue: 1 to 5 V
Elektros jungtis	Male connector M8, four pin
Paskirstymo pajėgumas	125 mA
Srovės suvartojimas	30 mA
Lygio indikatorius	LED

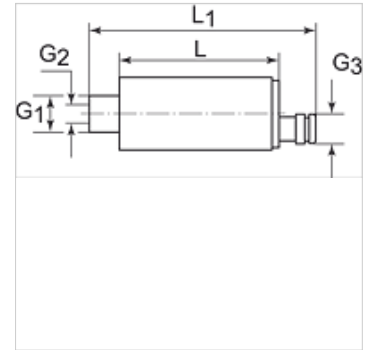

Nuoroda

Daugiau duomenų pagal užklausimą.

Aprašas

Universal electronic vacuum and pressure switch for safety monitoring, optimisation of cycle times and regulation circuits. Its small size and low weight permit installation directly at the point of use. Suitable for all special applications in the vacuum and compressed air sectors. Adjustable vacuum limit value and continuous vacuum monitoring.

Prekė

Pavadinimas	G1 išorėje	G2 viduje	G3 išorėje	L (mm)	L1 (mm)	Matavimo sritis	Įtampa
K- 07 45 01 31	G 1/8	M 5	M 8 x 1	44,0	62,0	-1 bis +10 bar	10.8 - 30 V DC