


# K-BKR KOM

Ball valves (wafer type), with double-acting actuator

**HANSA FLEX**

## Savybės

|                                    |                                                                                                 |
|------------------------------------|-------------------------------------------------------------------------------------------------|
| <b>Konstrukcija</b>                | Pneumatic actuators, in double- or single acting version, with integrated end-position feedback |
| <b>Darbinis slėgis</b>             | DN 15 - DN 50: max. 40 bar; DN 65 - DN 100: max. 16 bar                                         |
| <b>Darbinė temperatūra</b>         | -20 °C to +70 °C                                                                                |
| <b>Sukimo kampas</b>               | 90 °                                                                                            |
| <b>Valdymo slėgis</b>              | 5.5 bar                                                                                         |
| <b>Vožtuvo adapteris</b>           | Acc. to NAMUR                                                                                   |
| <b>Pavara</b>                      | aluminium eloxed                                                                                |
| <b>Pavaros sandariklis</b>         | NBR                                                                                             |
| <b>Rutulinis vožtuvas</b>          | Stainless steel 1.4408, with ISO-flange plate                                                   |
| <b>Rutulinio vožtuvo tarpiklis</b> | PTFE                                                                                            |

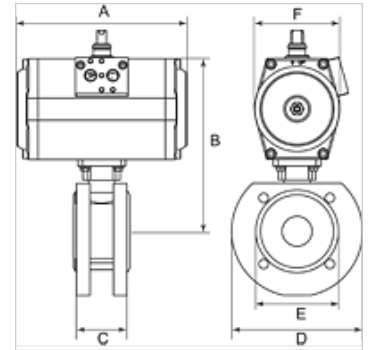

## Nuoroda

Daugiau duomenų pagal užklausimą.

## Aprašas

2-way ball valves compact flange type, full bore

## Prekė

| Pavadinimas    | DN  | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) | F (mm) |
|----------------|-----|--------|--------|--------|--------|--------|--------|
| K- 07 30 02 76 | 15  | 116,0  | 125,0  | 40,0   | 95,0   | 45,0   | 61,5   |
| K- 07 30 02 77 | 20  | 116,0  | 129,3  | 44,0   | 105,0  | 58,0   | 61,5   |
| K- 07 30 02 78 | 25  | 133,0  | 138,6  | 53,0   | 115,0  | 68,0   | 68,5   |
| K- 07 30 02 79 | 32  | 137,0  | 158,2  | 58,4   | 135,0  | 78,0   | 80,0   |
| K- 07 30 02 80 | 40  | 161,0  | 176,3  | 62,0   | 145,0  | 88,0   | 92,5   |
| K- 07 30 02 81 | 50  | 161,0  | 185,5  | 78,0   | 155,0  | 102,0  | 92,5   |
| K- 07 30 02 82 | 65  | 180,0  | 205,0  | 100,0  | 185,0  | 122,0  | 92,5   |
| K- 07 30 02 83 | 80  | 209,0  | 240,0  | 120,0  | 200,0  | 138,0  | 110,5  |
| K- 07 30 02 75 | 100 | 221,0  | 272,0  | 152,0  | 220,0  | 158,0  | 120,0  |