


K-MV G D 24 V DC

Normally closed, directly operated, 24 V DC (direct current)

HANSA FLEX

Savybės

Elektros jungtis	ISO 4400. cable socket (Pg 11P)
Apsaugos rūšis	IP65 (with connector socket fitted)
Medžiagos temperatūra	max. +80 °C with Perbunan-seal; max. +130 °C with FKM-Seal
Sriegių aprašas	G-thread acc. to DIN EN ISO 228-1, Rp-thread acc. to ISO 7-1
Korpusas, vožtuvo lizdas	Brass
Vidinės dalys	Stainless steel
Tarpiklis	Perbunan (NBR) or FKM

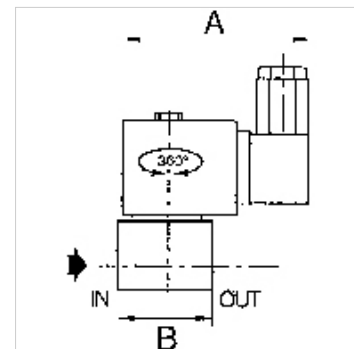

Nuoroda

Daugiau duomenų pagal užklausimą.

Aprašas

Standard series, proven over many years, available in three different versions: Directly operated, Combined operation, Pilot-operated. For all applications with compressed air, neutral gases or low-viscosity, neutral media.

Prekė

Pavadinimas	Sriegis	maks. darbinis slėgis (bar)	NW	Sandaravimo medžiaga	A (mm)	B (mm)	Gaminio forma
K- 07 30 23 08	G 1/8	5	3,2	NBR	75,0	30,0	1
K- 07 30 23 10	G 1/8	5	3,2	FKM	75,0	30,0	1
K- 07 30 23 09	G 1/4	4	3,2	NBR	75,0	40,0	2
K- 07 30 23 11	G 1/4	4	3,2	FKM	75,0	40,0	2