


K-MV O D 230 V, 50 - 60 HZ 1

Normally open, directly operated, 230 V, 50 to 60 Hz

HANSA FLEX

Savybės

Elektros jungtis	ISO 4400. cable socket (Pg 11P)
Apsaugos rūšis	IP65 (with connector socket fitted)
Medžiagos temperatūra	max. +80 °C with Perbunan-seal; max. +130 °C with FKM-Seal
Sriegių aprašas	G-thread acc. to DIN EN ISO 228-1, Rp-thread acc. to ISO 7-1
Korpusas, vožtuvo lizdas	Brass
Vidinės dalys	Stainless steel
Tarpiklis	Perbunan (NBR) or FKM

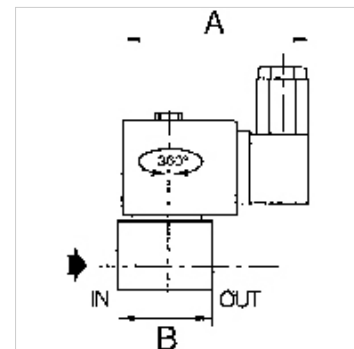

Nuoroda

Daugiau duomenų pagal užklausimą.

Aprašas

Standard series, proven over many years, available in three different versions: Directly operated, Combined operation, Pilot-operated. For all applications with compressed air, neutral gases or low-viscosity, neutral media.

Prekė

Pavadinimas	Sriegis	maks. darbinis slėgis (bar)	NW	Sandarinio medžiaga	A (mm)	B (mm)	Gaminio forma
K- 07 30 23 62	Rp 1/8	20	2,4	NBR	75,0	33,0	7
K- 07 30 23 64	Rp 1/8	20	2,4	FKM	75,0	33,0	1
K- 07 30 23 63	G 1/4	9	3,2	NBR	80,0	40,0	2
K- 07 30 23 65	G 1/4	9	3,2	FKM	80,0	40,0	2