


# K-SSV BR

Angle-seat valves with piston actuator

**HANSA FLEX**

## Savybės

Diferencinis slėgis	0 - 16 bar
Medžiagos temperatūra	-10 °C to +180 °C
Valdymo oro jungtis	G 1/8
Valdymo medžiagos temperatūra	max. +60 °C
Aplinkos temperatūra	-20 °C to +70 °C
Leidžiamas statinis slėgis	Max. 16 bar
Vožtuvo korpusas	Bronze
Jungties dalis	Stainless steel
Valdymo galvutė	Polyamide (glass fibre-reinforced)
Stūmoklis	Nickel-plated brass (DN 15 to DN 32), PBT + GF 30% (DN 40 to DN 50)
Velenėlis	Stainless steel
Sandarinimo medžiaga	PTFE

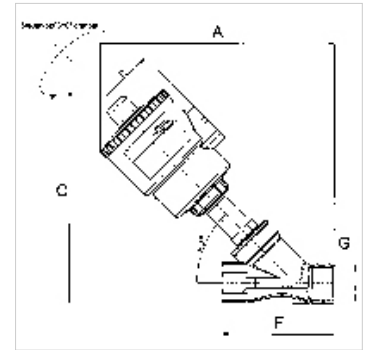

## Nuoroda

G thread acc. to DIN EN ISO 228-1, with ISO flange plate (acc. to ISO 5211)

For use on devices that have to be vented whenever they are turned off, either because of safety regulations or for technical reasons. The pneumatic devices are disconnected from the system and simultaneously vented each time they are shut off.

Daugiau duomenų pagal užklausimą.

## Aprašas

Angle-seat valves with external pilot control and a self-aligning valve disc for neutral (bronze body) or corrosive (stainless steel body) media. Very high flow due to angled seat design, Water hammer prevented by fluid entry under the disc, Suitable for vacuum operation (low vacuum), NAMUR interface on the piston actuator. 3/2 and 5/2-way valves can be mounted directly.

## Papildoma informacija

Other versions e.g. for steam on request

Information on max. operating differential pressures apply for air, gas, corrosive aggressive media, water

## Prekė

Pavadinimas	A (mm)	C (mm)	F (mm)	Sriegis	maks. eksploatacinio slėgio diferencialas (bar)	min. valdymo slėgis	maks. valdymo slėgis
K- 07 30 25 24	163,0	153,0	65,0	G 1/2	16	4	10
K- 07 30 25 25	173,0	163,0	75,0	G 3/4	10	4	10
K- 07 30 25 26	191,0	181,0	75,0	G 3/4	16	4	10
K- 07 30 25 27	206,0	196,0	90,0	G 1	11	4	10
K- 07 30 25 28	246,0	236,0	90,0	G 1	16	4	8
K- 07 30 25 29	255,0	245,0	110,0	G 1 1/4	14	4	8
K- 07 30 25 30	270,0	264,0	120,0	G 1 1/2	11	4	8
K- 07 30 25 31	306,0	300,0	120,0	G 1 1/2	16	4	8
K- 07 30 25 32	316,0	311,0	150,0	G 2	10	4	8