



# K-SCHWENKTUELLE MS

Swivel hose fittings, parallel male thread

**HANSA FLEX**

## Savybės

|                       |   |
|-----------------------|---|
| Darbinis slėgis       | 10 bar  |
| Medžiagos temperatūra | max. +90 °C   |
| Aplinkos temperatūra  | Max. +90 °C   |
| Medžiaga              | Nickel-plated brass (banjo bolt), brass (ring nipple) |

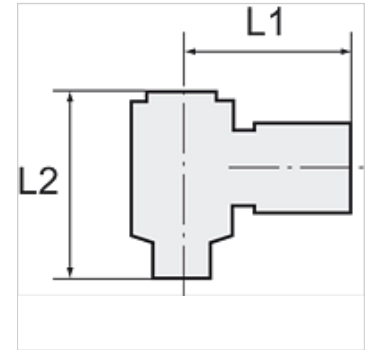

## Nuoroda

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.

Daugiau duomenų pagal užklausimą.

## Papildoma informacija

Further types and dimensions on request.

## Prekė

| Pavadinimas    | Sriegis | žarnai  | L1<br>(mm) | L2<br>(mm) | SW (rakto dydis) |
|----------------|---------|---------|------------|------------|------------------|
| K- 07 40 34 39 | G 1/8   | LW 4 mm | 26,0       | 28,0       | 14 mm            |
| K- 07 40 34 40 | G 1/8   | LW 6 mm | 26,0       | 28,0       | 14 mm            |
| K- 07 40 34 41 | G 1/4   | LW 6 mm | 28,0       | 29,0       | 17 mm            |
| K- 07 40 34 42 | G 1/4   | LW 9 mm | 28,0       | 30,5       | 17 mm            |
| K- 07 40 34 43 | G 3/8   | LW 6 mm | 30,0       | 32,0       | 22 mm            |
| K- 07 40 34 44 | G 3/8   | LW 9 mm | 30,0       | 32,0       | 22 mm            |