



# K-XVM ZYL POM BLAU

Male connectors, parallel male thread

**HANSA FLEX**

## Savybės

Darbinis slėgis	0 - 10 bar
Temperatūros diapazonas	-10 °C to +60 °C

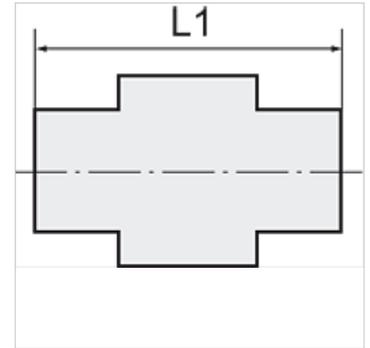

## Nuoroda

Daugiau duomenų pagal užklausimą.

## Prekė

Pavadinimas	Sriegis	žarnai	L1 (mm)	SW (rakto dydis)
K- 07 40 33 15	G 1/8	6 mm / 4 mm	28,0	13 mm
K- 07 40 33 16	G 1/8	8 mm / 6 mm	29,5	13 mm
K- 07 40 33 17	G 1/4	6 mm / 4 mm	31,0	17 mm
K- 07 40 33 18	G 1/4	8 mm / 6 mm	32,0	17 mm
K- 07 40 33 19	G 1/4	12 mm / 9 mm	37,5	19 mm
K- 07 40 33 20	G 1/4	10 mm / 8 mm	34,0	17 mm
K- 07 40 33 21	G 3/8	8 mm / 6 mm	34,0	19 mm
K- 07 40 33 22	G 3/8	10 mm / 8 mm	35,5	19 mm
K- 07 40 33 23	G 3/8	12 mm / 9 mm	37,5	19 mm