
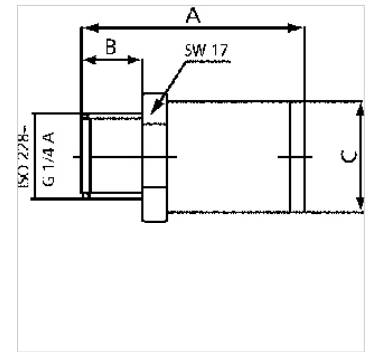


# K-DRGREDV

Pressure reducing valves

## Savybės

|                      |                           |
|----------------------|---------------------------|
| <b>Iėjimo slėgis</b> | Max. 15 bar               |
| <b>Jungtis</b>       | G 1/4 internal / external |
| <b>Medžiaga</b>      | žalvaris                  |



## Nuoroda

Dependent on the input pressure P1, the initial pressure P2 can vary between -20% to +20%  
Daugiau duomenų pagal užklausimą.

## Aprašas

Industry, trade and repair shops often require working pressures of 15 bar or less. These pressure reducing valves, which are screwed directly onto the tool, enable the actually necessary working pressure to be set. <br>Benefits: Significantly reduced risk of accidents, Longer tool life with fewer malfunctions, Lower noise levels at the workplace.

## Prekė

| Pavadinimas    | Reguliavimo slėgis | maks. srautas<br>(L/min) | A<br>(mm) | B      | Ø C<br>(mm) | SW<br>(mm) |
|----------------|--------------------|--------------------------|-----------|--------|-------------|------------|
| K- 07 25 19 31 | 2,0                | 300                      | 34,0      | 9,0 mm | 17,0        | 17         |
| K- 07 25 02 00 | 3,0                | 360                      | 34,0      | 9,0 mm | 17,0        | 17         |
| K- 07 25 02 01 | 4,0                | 380                      | 34,0      | 9,0 mm | 17,0        | 17         |
| K- 07 25 02 02 | 5,0                | 390                      | 34,0      | 9,0 mm | 17,0        | 17         |
| K- 07 25 02 03 | 6,0                | 405                      | 34,0      | 9,0 mm | 17,0        | 17         |
| K- 07 25 19 32 | 7,0                | 415                      | 34,0      | 9,0 mm | 17,0        | 17         |
| K- 07 25 19 33 | 8,0                | 420                      | 34,0      | 9,0 mm | 17,0        | 17         |