


# K-PRAEZI DRUCKREGL MEM SELU

Precision pressure regulators

**HANSA FLEX**

## Savybės

|                          |                                                                |
|--------------------------|----------------------------------------------------------------|
| Iėjimo slėgis            | Max. 16 bar                                                    |
| Medžiagos temperatūra    | max. 60 °C                                                     |
| Aplinkos temperatūra     | Max. 60 °C                                                     |
| Medžiagos                | Micro-filtered, unoiled compressed air (0.01 µm)               |
| Manometro jungtis        | G 1/8                                                          |
| Sandarinio medžiaga      | NBR                                                            |
| Korpusas                 | Die-cast zinc                                                  |
| Savasis oro sunaudojimas | 2.2 - 4.5 l/min, depending on input pressure and control range |

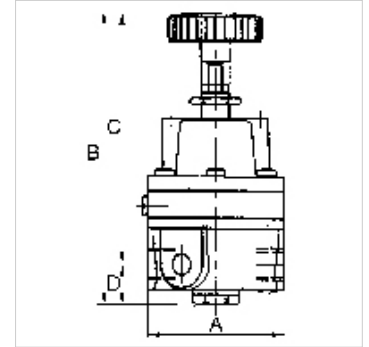

## Nuoroda

The given flow rates are based on the following parameters: 450 l/min: P1: 5 bar, P2: 2 bar,  $\Delta p \leq 0.1$  bar

570 l/min: P1: 7 bar, P2: 4 bar,  $\Delta p \leq 0.1$  bar

Attention! Wear parts kit not supplied! Pressure regulator may only be opened in the factory! 850 l/min: P1: 10 bar, P2: 7 bar,  $\Delta p \leq 0.1$  bar.

Daugiau duomenų pagal užklausimą.

## Aprašas

Diaphragm pressure regulators with self-relieving design for applications requiring an extremely accurate working pressure.

## Papildoma informacija

1500 l/min: P1: 10 bar, P2: 7 bar,  $\Delta p \leq 0.1$  bar.

## Prekė

| Pavadinimas    | Sriegis | Reguliavimo diapazonas | Srautas (L/min) | A (mm) | B        | C (mm) | D (mm) |
|----------------|---------|------------------------|-----------------|--------|----------|--------|--------|
| K- 07 25 09 43 | G 1/4   | 0.05 - 2 bar           | 450             | 58,0   | 124,0 mm | 107,0  | 17,0   |
| K- 07 25 09 44 | G 1/4   | 0.05 - 4 bar           | 570             | 58,0   | 124,0 mm | 107,0  | 17,0   |
| K- 07 25 09 45 | G 1/4   | 0.05 - 7 bar           | 850             | 58,0   | 124,0 mm | 107,0  | 17,0   |

## Atsarginės dalys

|                 |                                      |
|-----------------|--------------------------------------|
| K-HALTERBAUSATZ | Holder                               |
| K-FILTERELEMENT | Filter element                       |
| K-MANO NIPPEL   | Nipples for pressure gauges          |
| K-XV AGM 2      | Double nipples, parallel male thread |