


K-FI REGL H ABLV VA

Filter regulators

HANSA FLEX

Savybės

Įėjimo slėgis	Max. 30 bar
Medžiagos temperatūra	max. 130 °C
Aplinkos temperatūra	Max. 60 °C
Srautas	2500 l/min
Porų plotis filtro elemento	50 µm
Sandarinimo medžiaga	FKM
Membrana	PTFE on NBR base
Medžiaga	stainless steel 1.4404 (AISI 316L)
Drain valve	Manual drain valve
Srauto reikšmės matavimas	At P1 = 10 bar, P2 = 5 bar and pressure drop $\Delta p \leq 1$ bar

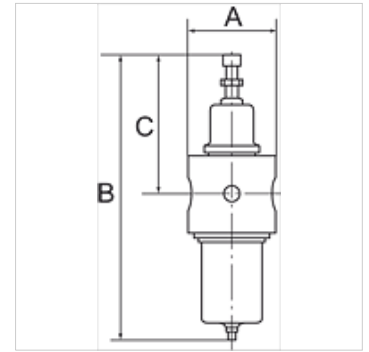

Nuoroda

Daugiau duomenų pagal užklausimą.

Aprašas

Stainless steel filter regulators with self-relieving (not for liquid media) containing no non-ferrous metals for use in the food processing, chemical, mining, plant construction and special machinery industries as well as in the medical technology.

užsakymo nuorodos

With filter element 5 µm available on request. Without self-relieving design (for liquids) available on request. With semi- or fully automatic drain valve on request. With NPT threads available on request.

Prekė

Pavadinimas	Sriegis	Reguliavimo diapazonas	A (mm)	B	C (mm)
K- 07 25 06 52	G 1/4	1.0 - 15.0 bar	65,0	250,0 mm	125,0
K- 07 25 06 51	G 1/2	1.0 - 15.0 bar	80,0	260,0 mm	127,0

Atsarginės dalys

K-HALTERBAUSATZ EDELSTAHL	Holder
K-MANO	Pressure gauges (CrNi steel type / connection on rear)
K-VERSCHLEI-SATZ	Set of wearing parts