


K-PRAEZI DRG DRUCKVER HANSA

Precision pressure regulators with continuous pressure supply

HANSA FLEX

Savybės

| | |
|---------------------------|---|
| Įėjimo slėgis | Max. 16 bar |
| Temperatūros diapazonas | -10 °C to +50 °C |
| Medžiagos | suslėgtas oras |
| Jungties sriegiai | Material: Die-cast zinc |
| Korpusas | Material: Grivory® (PA 66) |
| Membrana | NBR |
| Savasis oro sunaudojimas | 2.6 l/min at P2 = 6 bar (depending on secondary pressure) |
| Srauto reikšmės matavimas | At P1 = 10 bar, P2 = 6.3 bar and pressure drop $\Delta p = 1$ bar |

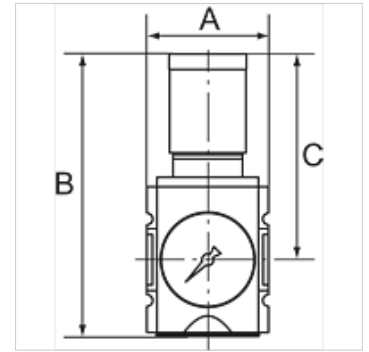

Nuoroda

Daugiau duomenų pagal užklausimą.

Aprašas

Precision diaphragm pressure regulators with self-relieving design and excellent flow rates in modern design for mounting side by side. By assembling two or more controllers together, it is possible to supply several working air circuits with different pressures via a single supply line.

užsakymo nuorodos

The price does not include a key lock. Please order separately.

Prekė

| Pavadinimas | Sriegis | Reguliavimo diapazonas | Srautas (L/min) | A (mm) | B | C (mm) |
|----------------|---------|------------------------|-----------------|--------|----------|--------|
| K- 07 25 09 66 | G 1/4 | 0.1 - 1 bar | 2200 | 52,0 | 128,5 mm | 95,5 |
| K- 07 25 09 67 | G 1/4 | 0.1 - 2 bar | 2200 | 52,0 | 128,5 mm | 95,5 |
| K- 07 25 09 68 | G 1/4 | 0.2 - 4 bar | 2200 | 52,0 | 128,5 mm | 95,5 |
| K- 07 25 09 69 | G 1/4 | 0.5 - 8 bar | 2200 | 52,0 | 128,5 mm | 95,5 |
| K- 07 25 09 70 | G 1/4 | 0.5 - 10 bar | 2200 | 52,0 | 128,5 mm | 95,5 |
| K- 07 25 09 71 | G 3/8 | 0.1 - 1 bar | 2700 | 52,0 | 128,5 mm | 95,5 |
| K- 07 25 09 72 | G 3/8 | 0.1 - 2 bar | 2700 | 52,0 | 128,5 mm | 95,5 |
| K- 07 25 09 73 | G 3/8 | 0.2 - 4 bar | 2700 | 52,0 | 128,5 mm | 95,5 |
| K- 07 25 09 74 | G 3/8 | 0.5 - 8 bar | 2700 | 52,0 | 128,5 mm | 95,5 |
| K- 07 25 09 75 | G 3/8 | 0.5 - 10 bar | 2700 | 52,0 | 128,5 mm | 95,5 |
| K- 07 25 09 76 | G 3/8 | 0.1 - 1 bar | 4300 | 63,0 | 149,5 mm | 110,0 |
| K- 07 25 09 77 | G 3/8 | 0.1 - 2 bar | 4300 | 63,0 | 149,5 mm | 110,0 |
| K- 07 25 09 78 | G 3/8 | 0.2 - 4 bar | 4300 | 63,0 | 149,5 mm | 110,0 |
| K- 07 25 09 79 | G 3/8 | 0.5 - 8 bar | 4300 | 63,0 | 149,5 mm | 110,0 |
| K- 07 25 09 80 | G 3/8 | 0.5 - 10 bar | 4300 | 63,0 | 149,5 mm | 110,0 |
| K- 07 25 09 81 | G 1/2 | 0.1 - 1 bar | 5000 | 63,0 | 149,5 mm | 110,0 |
| K- 07 25 09 82 | G 1/2 | 0.1 - 2 bar | 5000 | 63,0 | 149,5 mm | 110,0 |
| K- 07 25 09 83 | G 1/2 | 0.2 - 4 bar | 5000 | 63,0 | 149,5 mm | 110,0 |
| K- 07 25 09 84 | G 1/2 | 0.5 - 8 bar | 5000 | 63,0 | 149,5 mm | 110,0 |
| K- 07 25 09 85 | G 1/2 | 0.5 - 10 bar | 5000 | 63,0 | 149,5 mm | 110,0 |

Priedai

K-STECKSCHLOSS Key lock

Atsarginės dalys

| | |
|--------------------------|--------------------|
| K-HALTERBAUSATZ HANSA | Holder HANSA |
| K-SCHALTAFELMUTTER HANSA | Nut HANSA |
| K-DICHTSATZ HANSA | Set of seals HANSA |