


K-WTEH 3-TLG PC SCH MANO HANSA

Service units, 3-piece with polycarbonate bowl, bowl guard and pressure gauge

HANSA FLEX

Savybės

| | |
|---------------------------|---|
| Iėjimo slėgis | 1.5 - 16 bar |
| Išėjimo slėgis | 0.5 - 8 bar |
| Temperatūros diapazonas | -10 °C to +50 °C |
| Medžiagos | suslėgtas oras |
| Filtravimo blokas | 5,00 µm |
| Jungties sriegiai | Material: Die-cast zinc |
| Rezervuaras | Polycarbonate (with bayonet lock) |
| Filtravimo elementas | Cellpor (PE) |
| Korpusas | Material: Grivory® (PA 66) |
| Membrana | NBR |
| Apsauginis krepšelis | Polyamide |
| Lašėjimo antgalis | PA |
| Savasis oro sunaudojimas | Max. 1.5 l/min (depending on secondary pressure) |
| Srauto reikšmės matavimas | At P1 = 10 bar, P2 = 6.3 bar and pressure drop $\Delta p = 1$ bar |

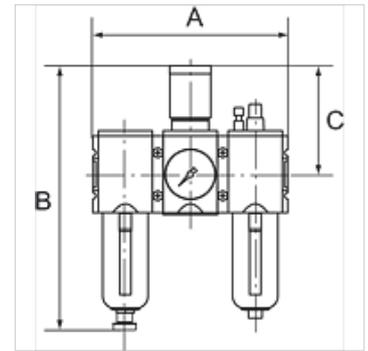

Nuoroda

Daugiau duomenų pagal užklausimą.

Aprašas

Two or three-piece service units with excellent flow rates in modern design. Lockable diaphragm pressure regulator with secondary ventilation, oil can be filled without interrupting operation.

užsakymo nuorodos

The price does not include a key lock. Please order separately.

Prekė

| Pavadinimas | Sriegis | Srautas (L/min) | A (mm) | B | C (mm) | Kondensato išleidimas |
|----------------|---------|-----------------|--------|----------|--------|-----------------------|
| K- 07 25 14 37 | G 1/4 | 1500 | 156,0 | 225,0 mm | 95,5 | Semi |
| K- 07 25 14 38 | G 3/8 | 1500 | 156,0 | 225,0 mm | 95,5 | Semi |
| K- 07 25 14 39 | G 3/8 | 3500 | 189,0 | 257,0 mm | 110,0 | Semi |
| K- 07 25 14 40 | G 1/2 | 3500 | 189,0 | 257,0 mm | 110,0 | Semi |
| K- 07 25 14 41 | G 3/4 | 12000 | 255,0 | 329,0 mm | 137,0 | Semi |
| K- 07 25 14 42 | G 1 | 12000 | 255,0 | 329,0 mm | 137,0 | Semi |
| K- 07 25 14 43 | G 1/4 | 1500 | 156,0 | 243,0 mm | 95,5 | Auto |
| K- 07 25 14 44 | G 3/8 | 1500 | 156,0 | 243,0 mm | 95,5 | Auto |
| K- 07 25 14 45 | G 3/8 | 3500 | 189,0 | 274,0 mm | 110,0 | Auto |
| K- 07 25 14 46 | G 1/2 | 3500 | 189,0 | 274,0 mm | 110,0 | Auto |
| K- 07 25 14 47 | G 3/4 | 12000 | 255,0 | 343,0 mm | 137,0 | Auto |
| K- 07 25 14 48 | G 1 | 12000 | 255,0 | 343,0 mm | 137,0 | Auto |

Priedai

K-STECKSCHLOSS Key lock

Atsarginės dalys

| | |
|------------------------------|-------------------------------|
| K-HALTERBAUSATZ HANSA | Holder HANSA |
| K-ERSATZBEHAELTER HANSA POLY | Spare tank HANSA polycarbonat |
| K-FILTERELEMENT | Filter element |
| K-TROPFAUFSATZ HANSA | Drip attachment HANSA |
| K-SCHALTTAFELMUTTER HANSA | Nut HANSA |
| K-DICHTSATZ HANSA | Set of seals HANSA |