


# K-DRG DRVS MULTIFIX

Pressure regulators with pressure supply at both ends

**HANSA FLEX**

## Savybės

|                           |   |
|---------------------------|---|
| Iėjimo slėgis             | Max. 16 bar   |
| Medžiagos temperatūra     | max. 60 °C  |
| Aplinkos temperatūra      | Max. 60 °C  |
| Sandarinimo medžiaga      | NBR   |
| Spyruoklės gaubtas        | POM-brass   |
| Korpusas                  | Die-cast zinc   |
| Srauto reikšmės matavimas | At P1 = 8 bar, P2 = 6 bar and pressure drop<br>$\Delta p = 1$ bar |

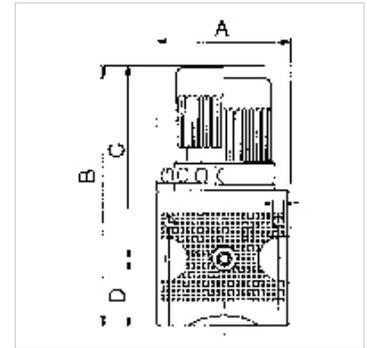

## Nuoroda

Daugiau duomenų pagal užklausimą.

## Aprašas

Diaphragm pressure regulators with self-relieving design for mounting side by side. The pressure setting can be locked by pushing the knob down. <br>By assembling two or more controllers together, it is possible to supply several working air circuits with different output pressures via a single supply line.

## užsakymo nuorodos

The port for the output pressure (P2) is on the rear! K-07250031: G 1/4, K-07250034: G 1/2. Lockable pressure regulators K-07250030 available on request.

## Prekė

| Pavadinimas    | Sriegis | Reguliavimo diapazonas | Srautas (L/min) | A (mm) | B        | C (mm) | D (mm) | DN | Gaminio dydis |
|----------------|---------|------------------------|-----------------|--------|----------|--------|--------|----|---------------|
| K- 07 25 00 31 | G 1/4   | 0.1 - 3 bar            | 2000            | 47,8   | 94,8 mm  | 67,0   | 27,8   | 6  | 1             |
| K- 07 25 00 32 | G 1/4   | 0.2 - 6 bar            | 2000            | 47,8   | 94,8 mm  | 67,0   | 27,8   | 6  | 1             |
| K- 07 25 00 30 | G 1/4   | 0.5 - 10 bar           | 2000            | 47,8   | 94,8 mm  | 67,0   | 27,8   | 6  | 1             |
| K- 07 25 00 34 | G 1/2   | 0.1 - 3 bar            | 5500            | 68,8   | 134,1 mm | 99,0   | 35,1   | 15 | 2             |
| K- 07 25 00 35 | G 1/2   | 0.2 - 6 bar            | 5500            | 68,8   | 134,1 mm | 99,0   | 35,1   | 15 | 2             |
| K- 07 25 00 33 | G 1/2   | 0.5 - 10 bar           | 5500            | 68,8   | 134,1 mm | 99,0   | 35,1   | 15 | 2             |

## Atsarginės dalys

|                          |                      |
|--------------------------|----------------------|
| K-HALTERBAUSATZ          | Holder               |
| K-SCHALTAFELMÜTTER       | Nut                  |
| K-HALTERBAUSATZ MULTIFIX | Holder               |
| K-KOPPELPAKET MEHR       | Coupling packet      |
| K-KOPPELPAKET SCHMA      | Coupling packet      |
| K-VERSCHLEI-SATZ         | Set of wearing parts |