


K-FI REGL PC-BEHAEL MANO MULTIFIX

Filter regulators with polycarbonate bowl and pressure gauge

HANSA FLEX

Savybės

Įėjimo slėgis	Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl)
Medžiagos temperatūra	max. 60 °C
Aplinkos temperatūra	Max. 60 °C
Porų plotis filtro elemento	5 µm (C55: 40 µm)
Sandarinimo medžiaga	NBR
Spyruoklės gaubtas	POM-brass
Korpusas	Die-cast zinc, Aluminium for G 1 variant
Drain valve	Semi-automatic
Srauto reikšmės matavimas	At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar

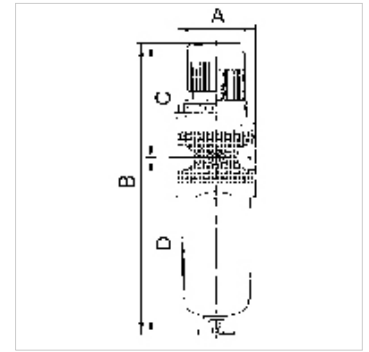

Nuoroda

Daugiau duomenų pagal užklausimą.

Aprašas

Reversible diaphragm pressure regulators, independent of inlet pressure, with secondary ventilation, in combination with a centrifugal separator. The pressure setting can be locked by pressing in the handwheel.

užsakymo nuorodos

Filter regulators with bowl guard and metal bowl are also available with control ranges of 0.1 - 3 bar, 0.2 - 6 bar and 0.5 - 16 bar. Please ask for more information. Lockable filter regulators available on request.

Prekė

Pavadinimas	Sriegis	Reguliuojamo diapazonas	Srautas (L/min)	A (mm)	B	C (mm)	D (mm)	DN	Gaminio dydis
K- 07 25 00 70	G 1/4	0.1 - 3 bar	1500	47,8	192,1 mm	67,0	125,1	6	1
K- 07 25 19 40	G 1/4	0.2 - 6 bar	1500	47,8	192,1 mm	67,0	125,1	6	-
K- 07 25 00 69	G 1/4	0.5 - 10 bar	1500	47,8	192,1 mm	67,0	125,1	6	1
K- 07 25 19 39	G 1/4	0.5 - 16 bar	1500	47,8	192,1 mm	67,0	125,1	6	-
K- 07 25 00 74	G 3/8	0.1 - 3 bar	1500	47,8	192,1 mm	67,0	125,1	10	1
K- 07 25 19 42	G 3/8	0.2 - 6 bar	1500	47,8	192,1 mm	67,0	125,1	10	-
K- 07 25 00 73	G 3/8	0.5 - 10 bar	1500	47,8	192,1 mm	67,0	125,1	10	1
K- 07 25 19 41	G 3/8	0.5 - 16 bar	1500	47,8	192,1 mm	67,0	125,1	10	-
K- 07 25 00 78	G 1/2	0.1 - 3 bar	3500	68,8	246,3 mm	99,0	147,3	15	2
K- 07 25 19 44	G 1/2	0.2 - 6 bar	3500	68,8	246,3 mm	99,0	147,3	15	-
K- 07 25 00 77	G 1/2	0.5 - 10 bar	3500	68,8	246,3 mm	99,0	147,3	15	2
K- 07 25 19 43	G 1/2	0.5 - 16 bar	3500	68,8	246,3 mm	99,0	147,3	15	-
K- 07 25 00 82	G 3/4	0.1 - 3 bar	3500	68,8	246,3 mm	99,0	147,3	20	2
K- 07 25 19 46	G 3/4	0.2 - 6 bar	3500	68,8	246,3 mm	99,0	147,3	20	-
K- 07 25 00 81	G 3/4	0.5 - 10 bar	3500	68,8	246,3 mm	99,0	147,3	20	2
K- 07 25 19 45	G 3/4	0.5 - 16 bar	3500	68,8	246,3 mm	99,0	147,3	20	-
K- 07 25 00 86	G 1	0.1 - 3 bar	12000	100,0	381,8 mm	128,0	253,8	25	3
K- 07 25 19 48	G 1	0.2 - 6 bar	12000	100,0	381,8 mm	128,0	253,8	25	-
K- 07 25 00 85	G 1	0.5 - 10 bar	12000	100,0	381,8 mm	128,0	253,8	25	3
K- 07 25 19 47	G 1	0.5 - 16 bar	12000	100,0	381,8 mm	128,0	253,8	25	-

Atsarginės dalys

K-HALTERBAUSATZ	Holder
K-SCHALTAFELMUTTER	Nut
K-HALTERBAUSATZ MULTIFIX	Holder
K-KOPPELPAKET MEHR	Coupling packet
K-KOPPELPAKET SCHMA	Coupling packet
K-METALLBEHAELTER OELER MULTIFIX	Metal tank oiler
K-PC-BEHAELTER FILTER MULTIFIX	Polycarbonate tank filter
K-SCHUTZKORB G	Protective cage



Nepaisant kruopštaus patikrinimo, negalime atmesti klaidų tikimybės, todėl už esamus duomenis neatsakome.

25.04.2025

HANSA-FLEX AG

www.hansa-flex.com

1

K-FI REGL PC-BEHAEL MANO MULTIFIX

Filter regulators with polycarbonate bowl and pressure gauge

HANSA FLEX