


K-WTEH 2-TLG PC-BEHAEL MULTIFIX

Service units, 2-piece with polycarbonate bowl

HANSA FLEX

Savybės

| | |
|-----------------------------|--|
| Įėjimo slėgis | Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl) |
| Medžiagos temperatūra | max. 60 °C |
| Aplinkos temperatūra | Max. 60 °C |
| Porų plotis filtro elemento | 5 µm (BG 1 / BG 2), 40 µm (BG 3) |
| Sandarinimo medžiaga | NBR |
| Spyruoklės gaubtas | POM-brass |
| Korpusas | Die-cast zinc, Aluminium for G 1 variant |
| Lašėjimo antgalis | PA (polycarbonate bowl), Zinc-glass-NBR (metal bowl) |
| Drain valve | Semi-automatic |
| Srauto reikšmės matavimas | At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |

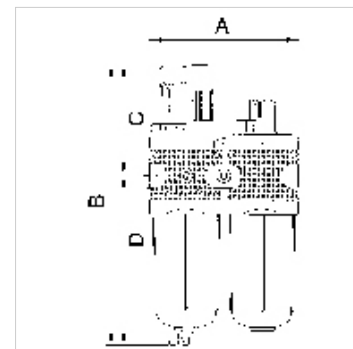

Nuoroda

Daugiau duomenų pagal užklausimą.

Aprašas

Two-piece service units consisting of a reversible diaphragm pressure regulator, independent of inlet pressure, with self-relieving design, combined with a centrifugal separator and a proportional lubricator.

užsakymo nuorodos

2-piece service units are also available in other control ranges (0.1 - 3 bar, 0.2 - 6 bar and 0.5 - 16 bar) and in lockable version. Please ask for more information.

Papildoma informacija

1500 l/min: P1: 10 bar, P2: 7 bar, $\Delta p \leq 0.1$ bar.

Prekė

| Pavadinimas | Sriegis | Reguliuojamo diapazonas | Srautas (L/min) | A (mm) | B | C (mm) | D (mm) | DN | Gaminio dydis |
|----------------|---------|-------------------------|-----------------|--------|----------|--------|--------|----|---------------|
| K- 07 25 01 29 | G 1/4 | 0.5 - 10 bar | 1100 | 92,8 | 192,1 mm | 67,0 | 125,1 | 6 | 1 |
| K- 07 25 01 32 | G 3/8 | 0.5 - 10 bar | 1100 | 92,8 | 192,1 mm | 67,0 | 125,1 | 10 | 1 |
| K- 07 25 01 35 | G 1/2 | 0.5 - 10 bar | 3500 | 134,8 | 246,3 mm | 99,0 | 147,3 | 15 | 2 |
| K- 07 25 01 38 | G 3/4 | 0.5 - 10 bar | 3500 | 134,8 | 246,3 mm | 99,0 | 147,3 | 20 | 2 |
| K- 07 25 01 41 | G 1 | 0.5 - 10 bar | 10500 | 200,0 | 381,8 mm | 128,0 | 253,8 | 25 | 3 |

Atsarginės dalys

| | |
|----------------------------------|-------------------------------|
| K-HALTERBAUSATZ | Holder |
| K-SCHALTTAFELMUTTER | Nut |
| K-HALTERBAUSATZ MULTIFIX | Holder |
| K-KOPPELPAKET MEHR | Coupling packet |
| K-KOPPELPAKET SCHMA | Coupling packet |
| K-METALLBEHAELTER OELER MULTIFIX | Metal tank oiler |
| K-PC-BEHAELTER FILTER MULTIFIX | Polycarbonate tank filter |
| K-SCHUTZKORB G | Protective cage |
| K-TROPFAUFSATZ POLYCARBO 1 | Drip attachment polycarbonate |
| K-TROPFAUFSATZ METALL | Drip attachment metal |
| K-FILTERELEMENT | Filter element |
| K-VERSCHLEI-SATZ | Set of wearing parts |
| K-AUTOMAT ABLASSVENTIL | Automatic drain valve |