


# K-FI REGL METALLBE MANO STANDARD-MI

Filter regulators with metal bowl, incl. pressure gauge and panel nut

**HANSA FLEX**

## Savybės

<b>Įėjimo slėgis</b>	Max. 16 bar (polycarbonate bowl), Max. 25 bar (metal bowl)
<b>Medžiagos temperatūra</b>	max. 60 °C
<b>Aplinkos temperatūra</b>	Max. 60 °C
<b>Srautas</b>	350 l/min
<b>Porų plotis filtro elemento</b>	5 µm
<b>Sandarinio medžiaga</b>	NBR
<b>Spyruoklės gaubtas</b>	POM-brass
<b>Korpusas</b>	Die-cast zinc, painted silver
<b>Drain valve</b>	Semi-automatic for variant with polycarbonate bowl, Manual for variant with metal bowl
<b>Srauto reikšmės matavimas</b>	At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar

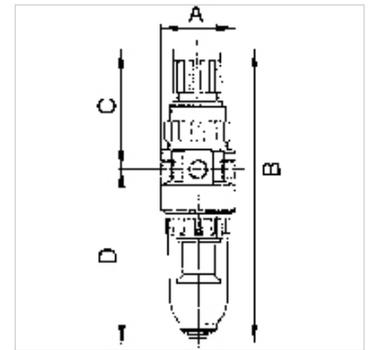

## Nuoroda

Daugiau duomenų pagal užklausimą.

## Aprašas

Compact, reversible diaphragm pressure regulators, independent of inlet pressure, with self-relieving design, combined with a centrifugal separator.  
<br>The pressure setting can be locked by pushing the knob down.

## Prekė

Pavadinimas	Sriegis	Reguliavimo diapazonas	A (mm)	B	C (mm)	D (mm)	DN
K- 07 25 06 65	G 1/8	0.5 - 10 bar	40,0	163,5 mm	65,0	98,5	5
K- 07 25 06 66	G 1/4	0.5 - 10 bar	40,0	163,5 mm	65,0	98,5	5

## Atsarginės dalys

<b>K-HALTERBAUSATZ</b>	Holder
<b>K-SCHALTTAFELMUTTER</b>	Nut
<b>K-ERSATZBEHAELTER MULTI MINI</b>	Spare tank »multifix-mini« & »standard-mini«
<b>K-PC-BEHAELTER FILTER MULTIFIX</b>	Polycarbonate tank filter
<b>K-FILTERELEMENT</b>	Filter element
<b>K-AUTOMAT ABLASSVENTIL</b>	Automatic drain valve
<b>K-LOESBARE DOPPELNIPPEL MS</b>	Double nipples
<b>K-XV AGM MS NI</b>	Double nipples, parallel male thread, nickel-plated brass
<b>K-VERSCHLEI-SATZ</b>	Set of wearing parts