


K-FI REGL PC-BEHÄEL MANO VARIOBLOC

Filter regulators with polycarbonate bowl and pressure gauge

HANSA FLEX

Savybės

| | |
|------------------------------------|---|
| Įėjimo slėgis | Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl) |
| Medžiagos temperatūra | max. 50 °C |
| Aplinkos temperatūra | Max. 50 °C (polycarbonate bowl), Max. 80 °C (metal bowl) |
| Porų plotis filtro elemento | 40 µm |
| Sandarinimo medžiaga | NBR |
| Spyruoklės gaubtas | POM |
| Korpusas | Die-cast zinc |
| Membrana | NBR |
| Drain valve | Manual |
| Srauto reikšmės matavimas | At P1 = 10 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |

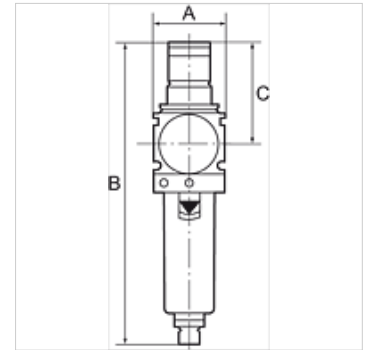

Nuoroda

Daugiau duomenų pagal užklausimą.

Aprašas

Reversible diaphragm pressure regulators, independent of inlet pressure, with self-relieving design, combined with a centrifugal separator. The pressure setting can be locked by pushing the knob down. Approved series in modern industrial design, with the following key benefits: Simple handling, Convenient modular assembly thanks to innovative fasteners, Excellent flow values.

užsakymo nuorodos

Filter regulators are also available with bowl guard or metal bowl. Filter regulators are also available in lockable version. Please ask for more information.

Papildoma informacija

Filter regulators are also available with bowl guard or metal bowl. Filter regulators are also available in lockable version. Please ask for more information.

Prekė

| Pavadinimas | Sriegis | Reguliavimo diapazonas | Srautas (L/min) | A (mm) | B | C (mm) |
|-----------------------|---------|------------------------|-----------------|--------|----------|--------|
| K- 07 25 06 85 | G 1/4 | 0.5 - 10 bar | 2000 | 48,0 | 203,0 mm | 68,0 |
| K- 07 25 06 87 | G 3/8 | 0.5 - 10 bar | 3000 | 48,0 | 203,0 mm | 68,0 |
| K- 07 25 06 89 | G 1/2 | 0.5 - 10 bar | 5500 | 70,0 | 273,0 mm | 98,0 |
| K- 07 25 06 91 | G 3/4 | 0.5 - 10 bar | 6500 | 70,0 | 273,0 mm | 98,0 |
| K- 07 25 06 93 | G 1 | 0.5 - 10 bar | 6500 | 124,0 | 273,0 mm | 98,0 |

Atsarginės dalys

| | |
|---|--|
| K-VERSCHLEI-SATZ VARIOBLOC | Set of wearing parts |
| K-ERSATZBEHÄELTER VARIOBLOC POLY | Spare tank Polycarbonat |
| K-FILTERELEMENT VARIOBLOC | Filter element |
| K-ABLASSVENTIL AUTO | Fully-automatic drain valve with Adapter G 1/8 |