
K-KURZH ZYL DOPPELW ACP

Short-stroke cylinders, double acting (magnetic, non-cushioned)

Savybės

Medžiagos	Filtered compressed air, lubricated (ensure continuity) or unlubricated
Darbinis slėgis	maks. 10 bar
Atsako slėgis	0,6 bar (Ø 12 bis Ø 32), 0,4 bar (Ø 40 bis Ø 80)
Temperatūros diapazonas	-10 °C to +80 °C
Stūmoklio kotas	C45 steel, hard chrome-plated
Vamzdis	Aluminium alloy, anodised
Galvutės skersmuo	Ø 12 to Ø 25 painted brass, Ø 32 to Ø 80 aluminium
Stūmoklis	Ø 12 to Ø 63 synthetic (acetal) resin, Ø 80 alu/ PTFE
Stūmoklio koto sandariklis	NBR (additional charge for PU and FKM)
Stūmoklio tarpiklis	NBR (additional charge for PU and FKM)



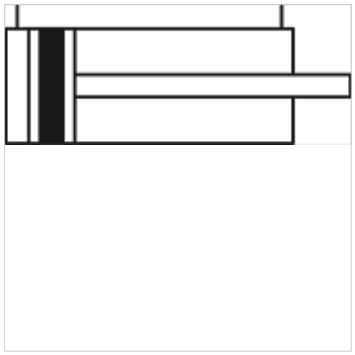

Nuoroda

Daugiau duomenų pagal užklausimą.

Aprašas

Suitable for installation in limited spaces, with magnet.

Papildoma informacija

Important: The scope of supply does not include a connector. Please order separately.

Other types, e.g. increased thermal stability, non-standard strokes, through rod, non-rotating version, etc., available on request.

Prekė

Pavadinimas	Stūmoklio Ø	Eiga (mm)	Jungtis	Stūmoklio koto vidaus sriegiai
K- 07 15 11 31	12 mm	5	M 5	M 3
K- 07 15 11 32	12 mm	10	M 5	M 3
K- 07 15 11 33	12 mm	25	M 5	M 3
K- 07 15 11 34	12 mm	30	M 5	M 3
K- 07 15 11 35	12 mm	40	M 5	M 3
K- 07 15 11 36	16 mm	5	M 5	M 5
K- 07 15 11 37	16 mm	10	M 5	M 5
K- 07 15 11 38	16 mm	25	M 5	M 5
K- 07 15 11 39	16 mm	30	M 5	M 5
K- 07 15 11 40	16 mm	40	M 5	M 5
K- 07 15 11 41	20 mm	5	M 5	M 5
K- 07 15 11 42	20 mm	10	M 5	M 5
K- 07 15 11 43	20 mm	25	M 5	M 5
K- 07 15 11 44	20 mm	30	M 5	M 5
K- 07 15 11 45	20 mm	40	M 5	M 5
K- 07 15 11 46	20 mm	50	M 5	M 5
K- 07 15 11 47	25 mm	5	G 1/8	M 5
K- 07 15 11 48	25 mm	10	G 1/8	M 5
K- 07 15 11 49	25 mm	25	G 1/8	M 5
K- 07 15 11 50	25 mm	30	G 1/8	M 5
K- 07 15 11 51	25 mm	40	G 1/8	M 5
K- 07 15 11 52	25 mm	50	G 1/8	M 5
K- 07 15 11 53	32 mm	5	G 1/8	M 6
K- 07 15 11 54	32 mm	10	G 1/8	M 6
K- 07 15 11 55	32 mm	25	G 1/8	M 6
K- 07 15 11 56	32 mm	30	G 1/8	M 6
K- 07 15 11 57	32 mm	40	G 1/8	M 6
K- 07 15 11 58	32 mm	50	G 1/8	M 6
K- 07 15 11 59	40 mm	5	G 1/8	M 6
K- 07 15 11 60	40 mm	10	G 1/8	M 6
K- 07 15 11 61	40 mm	25	G 1/8	M 6
K- 07 15 11 62	40 mm	30	G 1/8	M 6

Nepaisant kruopštaus patikrinimo, negalime atmesti klaidų tikimybės, todėl už esamus duomenis neatsakome.

K-KURZH ZYL DOPPELW ACP

Short-stroke cylinders, double acting (magnetic, non-cushioned)

HANSA-FLEX

Prekė

Pavadinimas	Stūmoklio Ø	Eiga (mm)	Jungtis	Stūmoklio koto vidaus sriegiai
K- 07 15 11 63	40 mm	40	G 1/8	M 6
K- 07 15 11 64	40 mm	50	G 1/8	M 6
K- 07 15 11 65	50 mm	5	G 1/8	M 8
K- 07 15 11 66	50 mm	10	G 1/8	M 8
K- 07 15 11 67	50 mm	25	G 1/8	M 8
K- 07 15 11 68	50 mm	30	G 1/8	M 8
K- 07 15 11 69	50 mm	40	G 1/8	M 8
K- 07 15 11 70	50 mm	50	G 1/8	M 8
K- 07 15 11 71	50 mm	70	G 1/8	M 8
K- 07 15 11 72	63 mm	5	G 1/8	M 8
K- 07 15 11 73	63 mm	10	G 1/8	M 8
K- 07 15 11 74	63 mm	25	G 1/8	M 8
K- 07 15 11 75	63 mm	30	G 1/8	M 8
K- 07 15 11 76	63 mm	40	G 1/8	M 8
K- 07 15 11 77	63 mm	50	G 1/8	M 8
K- 07 15 11 78	63 mm	70	G 1/8	M 8
K- 07 15 11 79	80 mm	5	G 1/4	M 10
K- 07 15 11 80	80 mm	10	G 1/4	M 10
K- 07 15 11 81	80 mm	25	G 1/4	M 10
K- 07 15 11 82	80 mm	30	G 1/4	M 10
K- 07 15 11 83	80 mm	40	G 1/4	M 10
K- 07 15 11 84	80 mm	50	G 1/4	M 10
K- 07 15 11 85	80 mm	70	G 1/4	M 10
K- 07 15 11 86	80 mm	100	G 1/4	M 10

Priedai

K-MAGNETSENSOREN-REED	Reed magnetic sensor (incl. 2.5 m cable)