


K-NORMZYLINDER

Standard cylinders

HANSA FLEX

Savybės

Medžiagos	Filtered, unlubricated or lubricated compressed air. If lubrication is used, it must be continuous.
Darbinis slėgis	Max. 10 bar
Atsako slėgis	0,4 bar (Ø 32 bis Ø 40), 0,3 bar (Ø 50 bis Ø 63), 0,2 bar (Ø 80 bis Ø 125)
Temperatūros diapazonas	-20 °C to +70 °C (Ø 32 to Ø 63) -10 °C to +70 °C (Ø 80 to Ø 125)
Surinkimo	Heads / jacket with self-tapping screws
Stūmoklio kotas	C45 steel, hard chrome-plated
Vamzdis	Anodised aluminium jacket with integrated T-slots
Stūmoklis	POM (Ø 20 to Ø 63); Aluminium (Ø 80 to Ø 125)
Sandarinimo medžiaga	NBR

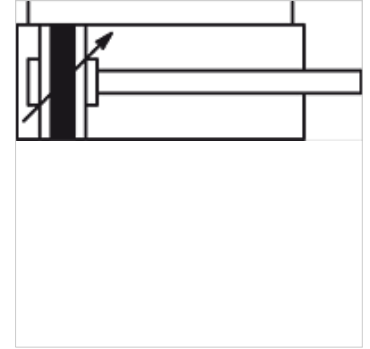

Nuoroda

Daugiau duomenų pagal užklausimą.

Aprašas

These cylinders are ideal for a wide range of applications owing to their robust design and excellent value for money. The standard type has a double-acting cylinder and features a magnetic piston as well as integrated cushioning. The magnetic switches can be mounted in two T-slots on the same side as the compressed air supply.
Cylinders of the same type can also be supplied on request with fixing parts for magnetic switches on three sides.
The version with a 125 mm bore is provided with fixing accessories on three sides as standard.

Prekė

Pavadinimas	Stūmoklio Ø	Eiga (mm)	Jungtis	Stūmoklio koto Ø (mm)	Stūmoklio koto išoriniai sriegiai
K- 07 15 15 90	32 mm	25	G 1/8	12	M 10 x 1.25
K- 07 15 15 91	32 mm	50	G 1/8	12	M 10 x 1.25
K- 07 15 15 92	32 mm	80	G 1/8	12	M 10 x 1.25
K- 07 15 15 93	32 mm	100	G 1/8	12	M 10 x 1.25
K- 07 15 15 94	32 mm	125	G 1/8	12	M 10 x 1.25
K- 07 15 15 95	32 mm	160	G 1/8	12	M 10 x 1.25
K- 07 15 15 96	32 mm	200	G 1/8	12	M 10 x 1.25
K- 07 15 15 97	32 mm	250	G 1/8	12	M 10 x 1.25
K- 07 15 15 98	32 mm	320	G 1/8	12	M 10 x 1.25
K- 07 15 15 99	32 mm	400	G 1/8	12	M 10 x 1.25
K- 07 15 16 00	32 mm	500	G 1/8	12	M 10 x 1.25
K- 07 15 16 01	32 mm	600	G 1/8	12	M 10 x 1.25
K- 07 15 16 02	32 mm	800	G 1/8	12	M 10 x 1.25
K- 07 15 16 03	40 mm	25	G 1/4	16	M 12 x 1.25
K- 07 15 16 04	40 mm	50	G 1/4	16	M 12 x 1.25
K- 07 15 16 05	40 mm	80	G 1/4	16	M 12 x 1.25
K- 07 15 16 06	40 mm	100	G 1/4	16	M 12 x 1.25
K- 07 15 16 07	40 mm	125	G 1/4	16	M 12 x 1.25
K- 07 15 16 08	40 mm	160	G 1/4	16	M 12 x 1.25
K- 07 15 16 09	40 mm	200	G 1/4	16	M 12 x 1.25
K- 07 15 16 10	40 mm	250	G 1/4	16	M 12 x 1.25
K- 07 15 16 11	40 mm	320	G 1/4	16	M 12 x 1.25
K- 07 15 16 12	40 mm	400	G 1/4	16	M 12 x 1.25
K- 07 15 16 13	40 mm	500	G 1/4	16	M 12 x 1.25
K- 07 15 16 14	40 mm	600	G 1/4	16	M 12 x 1.25
K- 07 15 16 15	40 mm	800	G 1/4	16	M 12 x 1.25
K- 07 15 16 16	50 mm	25	G 1/4	20	M 16 x 1.5
K- 07 15 16 17	50 mm	50	G 1/4	20	M 16 x 1.5
K- 07 15 16 18	50 mm	80	G 1/4	20	M 16 x 1.5
K- 07 15 16 19	50 mm	100	G 1/4	20	M 16 x 1.5
K- 07 15 16 20	50 mm	125	G 1/4	20	M 16 x 1.5
K- 07 15 16 21	50 mm	160	G 1/4	20	M 16 x 1.5
K- 07 15 16 22	50 mm	200	G 1/4	20	M 16 x 1.5
K- 07 15 16 23	50 mm	250	G 1/4	20	M 16 x 1.5
K- 07 15 16 24	50 mm	320	G 1/4	20	M 16 x 1.5



Nepaisant kruopštaus patikrinimo, negalime atmesti klaidų tikimybės, todėl už esamus duomenis neatsakome.

25.08.2024

HANSA-FLEX AG

www.hansa-flex.com

1

K-NORMZYLINDER

Standard cylinders

HANSA FLEX

Prekė

Pavadinimas	Stūmoklio Ø	Eiga (mm)	Jungtis	Stūmoklio koto Ø (mm)	Stūmoklio koto išoriniai sriegiai
K- 07 15 16 25	50 mm	400	G 1/4	20	M 16 x 1.5
K- 07 15 16 26	50 mm	500	G 1/4	20	M 16 x 1.5
K- 07 15 16 27	50 mm	600	G 1/4	20	M 16 x 1.5
K- 07 15 16 28	50 mm	800	G 1/4	20	M 16 x 1.5
K- 07 15 16 29	63 mm	25	G 3/8	20	M 16 x 1.5
K- 07 15 16 30	63 mm	50	G 3/8	20	M 16 x 1.5
K- 07 15 16 31	63 mm	80	G 3/8	20	M 16 x 1.5
K- 07 15 16 32	63 mm	100	G 3/8	20	M 16 x 1.5
K- 07 15 16 33	63 mm	125	G 3/8	20	M 16 x 1.5
K- 07 15 16 34	63 mm	160	G 3/8	20	M 16 x 1.5
K- 07 15 16 35	63 mm	200	G 3/8	20	M 16 x 1.5
K- 07 15 16 36	63 mm	250	G 3/8	20	M 16 x 1.5
K- 07 15 16 37	63 mm	320	G 3/8	20	M 16 x 1.5
K- 07 15 16 38	63 mm	400	G 3/8	20	M 16 x 1.5
K- 07 15 16 39	63 mm	500	G 3/8	20	M 16 x 1.5
K- 07 15 16 40	63 mm	600	G 3/8	20	M 16 x 1.5
K- 07 15 16 41	63 mm	800	G 3/8	20	M 16 x 1.5
K- 07 15 16 42	80 mm	25	G 3/8	25	M 20 x 1.5
K- 07 15 16 43	80 mm	50	G 3/8	25	M 20 x 1.5
K- 07 15 16 44	80 mm	80	G 3/8	25	M 20 x 1.5
K- 07 15 16 45	80 mm	100	G 3/8	25	M 20 x 1.5
K- 07 15 16 46	80 mm	125	G 3/8	25	M 20 x 1.5
K- 07 15 16 47	80 mm	160	G 3/8	25	M 20 x 1.5
K- 07 15 16 48	80 mm	200	G 3/8	25	M 20 x 1.5
K- 07 15 16 49	80 mm	250	G 3/8	25	M 20 x 1.5
K- 07 15 16 50	80 mm	320	G 3/8	25	M 20 x 1.5
K- 07 15 16 51	80 mm	400	G 3/8	25	M 20 x 1.5
K- 07 15 16 52	80 mm	500	G 3/8	25	M 20 x 1.5
K- 07 15 16 53	80 mm	600	G 3/8	25	M 20 x 1.5
K- 07 15 16 54	80 mm	800	G 3/8	25	M 20 x 1.5
K- 07 15 15 64	100 mm	25	G 1/2"	25	M 20 x 1.5
K- 07 15 15 65	100 mm	50	G 1/2"	25	M 20 x 1.5
K- 07 15 15 66	100 mm	80	G 1/2"	25	M 20 x 1.5
K- 07 15 15 67	100 mm	100	G 1/2"	25	M 20 x 1.5
K- 07 15 15 68	100 mm	125	G 1/2"	25	M 20 x 1.5
K- 07 15 15 69	100 mm	160	G 1/2"	25	M 20 x 1.5
K- 07 15 15 70	100 mm	200	G 1/2"	25	M 20 x 1.5
K- 07 15 15 71	100 mm	250	G 1/2"	25	M 20 x 1.5
K- 07 15 15 72	100 mm	320	G 1/2"	25	M 20 x 1.5
K- 07 15 15 73	100 mm	400	G 1/2"	25	M 20 x 1.5
K- 07 15 15 74	100 mm	500	G 1/2"	25	M 20 x 1.5
K- 07 15 15 75	100 mm	600	G 1/2"	25	M 20 x 1.5
K- 07 15 15 76	100 mm	800	G 1/2"	25	M 20 x 1.5
K- 07 15 15 77	125 mm	25	G 1/2"	32	M 27 x 2
K- 07 15 15 78	125 mm	50	G 1/2"	32	M 27 x 2
K- 07 15 15 79	125 mm	80	G 1/2"	32	M 27 x 2
K- 07 15 15 80	125 mm	100	G 1/2"	32	M 27 x 2
K- 07 15 15 81	125 mm	125	G 1/2"	32	M 27 x 2
K- 07 15 15 82	125 mm	160	G 1/2"	32	M 27 x 2
K- 07 15 15 83	125 mm	200	G 1/2"	32	M 27 x 2
K- 07 15 15 84	125 mm	250	G 1/2"	32	M 27 x 2
K- 07 15 15 85	125 mm	320	G 1/2"	32	M 27 x 2
K- 07 15 15 86	125 mm	400	G 1/2"	32	M 27 x 2
K- 07 15 15 87	125 mm	500	G 1/2"	32	M 27 x 2
K- 07 15 15 88	125 mm	600	G 1/2"	32	M 27 x 2
K- 07 15 15 89	125 mm	800	G 1/2"	32	M 27 x 2

Priedai

K-FUSSBEFESTIGUNG 3	Foot model
K-SCHWENKGABELBEFESTIG	Female hinge model
K-SCHWENKAUGENBEFEST 1	Male hinge model
K-SPHAERISCHE SCHWENKAUGENB	Articulated male hinge model
K-GEGENLAGER 1	Counter-hinge model



Nepaisant kruopštaus patikrinimo, negalime atmesti klaidų tikimybės, todėl už esamus duomenis neatsakome.

25.08.2024

HANSA-FLEX AG

www.hansa-flex.com

2

