


K-RUNDZYLINDER EINF O D

Miniature cylinders, single-acting (magnetic, non-cushioned)

HANSA FLEX

Savybės

| | |
|--------------------------------|---|
| Medžiagos | Filtered, unlubricated or lubricated compressed air. If lubrication is used, it must be continuous. |
| Darbinis slėgis | Max. 10 bar |
| Atsako slėgis | 0,8 bar (Ø 8 bis Ø 12), 0,6 bar (Ø 16 bis Ø 25) |
| Temperatūros diapazonas | -10 °C to +80 °C |
| Surinkimo | Flanged joint between stainless steel barrel and heads |
| Stūmoklio kotas | C45 steel, hard chrome-plated |
| Vamzdis | Stainless steel 1.4301 |
| Stūmoklis | Synthetic (acetal) resin |
| Sandarinio medžiaga | NBR |

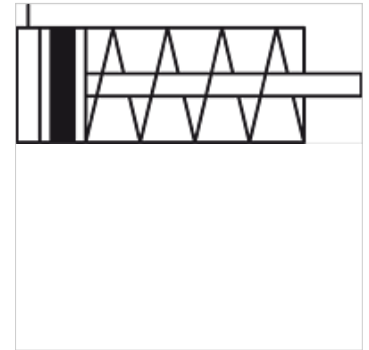

Nuoroda

Maximum recommended stroke: Double-acting: Ø 8 - Ø 10 = 100 stroke, Ø 12 - Ø 16 = 200 stroke, Ø 20 - Ø 25 = 250 stroke

Single-acting: Ø 8 - Ø 25 = 50 stroke. Longer stroke lengths can cause operational malfunctions.

Daugiau duomenų pagal užklausimą.

Aprašas

Single and double-acting cylinders, with magnetic piston.

Papildoma informacija

Important: The scope of supply does not include a connector. Please order separately.

Prekė

| Pavadinimas | Stūmoklio Ø | Eiga (mm) | Jungtis | Stūmoklio koto sriegiai |
|----------------|-------------|-----------|---------|-------------------------|
| K- 07 15 17 11 | 8 mm | 10 | M 5 | M 4 |
| K- 07 15 17 12 | 8 mm | 25 | M 5 | M 4 |
| K- 07 15 17 13 | 8 mm | 50 | M 5 | M 4 |
| K- 07 15 17 14 | 10 mm | 10 | M 5 | M 4 |
| K- 07 15 17 15 | 10 mm | 25 | M 5 | M 4 |
| K- 07 15 17 16 | 10 mm | 50 | M 5 | M 4 |
| K- 07 15 17 17 | 12 mm | 10 | M 5 | M 6 |
| K- 07 15 17 18 | 12 mm | 25 | M 5 | M 6 |
| K- 07 15 17 19 | 12 mm | 50 | M 5 | M 6 |
| K- 07 15 17 20 | 16 mm | 10 | M 5 | M 6 |
| K- 07 15 17 21 | 16 mm | 25 | M 5 | M 6 |
| K- 07 15 17 22 | 16 mm | 50 | M 5 | M 6 |
| K- 07 15 17 23 | 20 mm | 10 | G 1/8 | M 8 |
| K- 07 15 17 24 | 20 mm | 25 | G 1/8 | M 8 |
| K- 07 15 17 25 | 20 mm | 50 | G 1/8 | M 8 |
| K- 07 15 17 26 | 25 mm | 10 | G 1/8 | M 10 x 1.25 |
| K- 07 15 17 27 | 25 mm | 25 | G 1/8 | M 10 x 1.25 |
| K- 07 15 17 28 | 25 mm | 50 | G 1/8 | M 10 x 1.25 |

Priedai

| | |
|------------------------------------|--------------------------------------|
| K-FUSSBEFESTIGUNG 5 | Foot model |
| K-FLANSCHBEFESTIGUNGEN1 | Flange model |
| K-KOPFMUTTER DECKEL BODEN 2 | Hexagon nut (for head) |
| K-GABELKOEPF 3 | Fork model |
| K-GELENKAUGEN 2 | Rod eye model |
| K-SCHWENKLAGER 1 | Counter-hinge model |
| K-SENSORHALTER | Sensor support (with T-slot adapter) |
| K-SENSOREN T-NUT 1 | Sensor for T-slot |