
K-FI MIKRO M DIFFERENZ MANO

Micro-filters with differential pressure gauge

Savybės

Įėjimo slėgis	Min. 4 bar, Max. 16 bar
Diferencinio slėgio manometro indikatorių sritis	0 - 2 bar
Korpusas, filtro rezervuaras	Aluminium
Aplinkos temperatūra	+5 °C to +60 °C
Filtravimo blokas	0,01 µm
Naudingumo koeficientas	99.9999 %
Filtro įdėklas	Borosilicate (with glass-fibre and foam plastic)
Srauto reikšmės matavimas	At P1 = 6 bar and pressure drop Δp = 1.5%



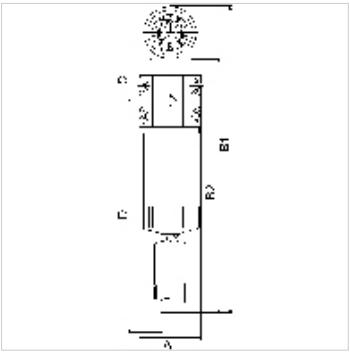

Nuoroda

Daugiau duomenų pagal užklausimą.

Aprašas

Suitable for all applications where the standard centrifugal separators do not afford the desired efficiency. The pre-filters and micro-filters are equipped with an automatic drain valve. All devices can be supplied with or without a differential pressure gauge. The differential pressure gauge indicates the degree of contamination of the filter element as a function of the pressure drop.

Prekė

Pavadinimas	Sriegis	Srautas (L/min)	A (mm)	B1 (mm)	B2 (mm)	C (mm)	D (mm)
K- 07 25 13 02	G 1/4	1300	82,5	407,0	335,0	57,0	353,0
K- 07 25 13 03	G 3/8	1300	82,5	407,0	335,0	57,0	353,0
K- 07 25 13 04	G 1/2	1300	82,5	407,0	335,0	57,0	353,0
K- 07 25 13 05	G 3/4	2000	82,5	477,0	405,0	57,0	493,0
K- 07 25 13 06	G 1	4080	118,0	492,0	420,0	72,0	458,0
K- 07 25 13 07	G 1 1/4	4580	118,0	592,0	520,0	72,0	658,0
K- 07 25 13 08	G 1 1/2	6500	118,0	692,0	620,0	72,0	858,0
K- 07 25 13 09	G 2	9000	118,0	882,0	810,0	72,0	1238,0

Atsarginės dalys

K-FILTERELEMENT SONDER	Filter element
K-VERBINDUNGELEMENTE SOND	Connecting sets
K-HALTERBAUSATZ	Holder
K-DIFFERENZDRUCKMANOMETER	Differential pressure gauge
K-AUTOMAT ABLASSVENTIL	Automatic drain valve

Nepaisant kruopštaus patikrinimo, negalime atmesti klaidų tikimybės, todėl už esamus duomenis neatsakome.