
# K-VORFILTER O MANO

Pre-filters without differential pressure gauge

## Savybės

| | |
|---|---|
| **Įėjimo slėgis** | Min. 4 bar, Max. 16 bar |
| **Diferencinio slėgio manometro indikatorių sritis** | 0 - 2 bar |
| **Korpusas, filtro rezervuaras** | Aluminium |
| **Aplinkos temperatūra** | +5 °C to +60 °C |
| **Filtravimo blokas** | 2,00 µm |
| **Dalelių nusodinimas** | 2 µm |
| **Naudingumo koeficientas** | 99.99 % |
| **Filtro įdėklas** | Polyethylene (with 45% cavity) |
| **Srauto reikšmės matavimas** | At P1 = 6 bar and pressure drop Δp = 0.5% |



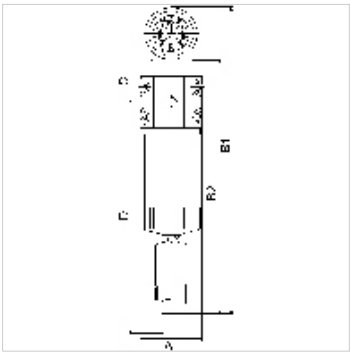


## Nuoroda

Daugiau duomenų pagal užklausimą.

## Aprašas

Suitable for all applications where the standard centrifugal separators do not afford the desired efficiency. The pre-filters and micro-filters are equipped with an automatic drain valve. All devices can be supplied with or without a differential pressure gauge. The differential pressure gauge indicates the degree of contamination of the filter element as a function of the pressure drop.

## Prekė

| Pavadinimas | Sriegis | Srautas (L/min) | A (mm) | B2 (mm) | C (mm) | D (mm) |
|---|---|---|---|---|---|---|
| **K- 07 25 12 94** | G 1/4 | 1000 | 82,5 | 338,0 | 57,0 | 353,0 |
| **K- 07 25 12 95** | G 3/8 | 1000 | 82,5 | 338,0 | 57,0 | 353,0 |
| **K- 07 25 12 96** | G 1/2 | 1000 | 82,5 | 338,0 | 57,0 | 353,0 |
| **K- 07 25 12 97** | G 3/4 | 2000 | 82,5 | 408,0 | 57,0 | 493,0 |
| **K- 07 25 12 98** | G 1 | 3000 | 118,0 | 423,0 | 72,0 | 458,0 |
| **K- 07 25 12 99** | G 1 1/4 | 5300 | 118,0 | 523,0 | 72,0 | 658,0 |
| **K- 07 25 13 00** | G 1 1/2 | 8300 | 118,0 | 623,0 | 72,0 | 858,0 |
| **K- 07 25 13 01** | G 2 | 13000 | 118,0 | 813,0 | 72,0 | 1238,0 |

## Atsarginės dalys

| | |
|---|---|
| **K-FILTERELEMENT SONDER** | Filter element |
| **K-VERBINDUNGELEMENTE SOND** | Connecting sets |
| **K-HALTERBAUSATZ** | Holder |
| **K-AUTOMAT ABLASSVENTIL** | Automatic drain valve |

*Nepaisant kruopštaus patikrinimo, negalime atmesti klaidų tikimybės, todėl už esamus duomenis neatsakome.*