


K-WTST SAFETY BKR SCHA AN DR MULTI

SAFETY service unit sets, comprising a ball valve with silencer, start-up valve and pressure regulator with lock cylinder

HANSA FLEX

Savybės

| | |
|------------------------------------|--|
| Iėjimo slėgis | 2 - 16 bar |
| Išėjimo slėgis | 0.5 - 10 bar |
| Temperatūros diapazonas | Max. 60 °C |
| Medžiagos | suslėgtas oras |
| Sandarinimo medžiaga | NBR |
| Rezervuaras | Polycarbonate (with bayonet lock) and bowl guard |
| Spyruoklės gaubtas | POM |
| Filtravimo elementas | Cellpor (PE) 5 µm |
| Korpusas | Die-cast zinc |
| Membrana | NBR |
| Drain valve | Semi-automatic |
| Srauto reikšmės matavimas | At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |
| Daugiau duomenų | see data sheets of the individual components (on request) |
| Oro išl. Jungt. Rutulinis vožtuvas | Silencer |

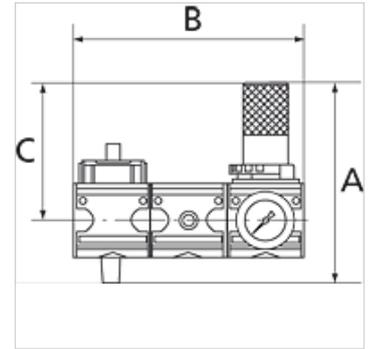

Aprašas

These compressed air service unit sets, comprising a ball valve with silencer, a start-up valve and one out of a pressure regulator, filter regulator or service unit, meet even the strictest requirements for operating reliability and accident prevention!

užsakymo nuorodos

The price does not include a padlock. Please order separately. For accessories and spare parts, refer to individual components: ball valve, start-up valve, pressure regulator, filter regulator, 2-piece service unit.

Prekė

| Pavadinimas | Sriegis | Reguliavimo diapazonas | Srautas (L/min) | A (mm) | B | C (mm) |
|----------------|---------|------------------------|-----------------|--------|----------|--------|
| K- 07 25 15 11 | G 1/4 | 2 - 10 bar | 1000 | 128,0 | 137,8 mm | 94,0 |
| K- 07 25 15 12 | G 1/2 | 2 - 10 bar | 4000 | 189,0 | 200,8 mm | 122,0 |
| K- 07 25 15 13 | G 1 | 2 - 10 bar | 12000 | 241,7 | 282,8 mm | 157,0 |