K-KURZH ZYL DOPPELW IG ASQ


Short-stroke cylinders, double-acting, with magnet, non-cushioned, with female thread, »ACQ« Series

HANSA FLEX

Savybės

Medžiagos	Filtered, unlubricated or lubricated compressed air. If lubrication is used, it must be continuous.
Darbinis slėgis	1 - 10 bar (double-acting); 2 - 10 bar (single-acting)
Temperatūros diapazonas	-20 °C to +80 °C
Stūmoklio kotas	Hardened steel, thick-chromed
Stūmoklis	Brass (12 to 16 mm); Aluminium (20 to 100 mm)
Sandarinimo medžiaga	NBR
Cilindrinis vamzdis	Aluminium



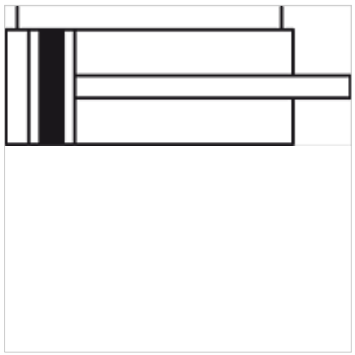

Nuoroda

Daugiau duomenų pagal užklausimą.

Aprašas

Specially for use where space is in short supply. Version with magnetic piston. Short-stroke cylinder in two different versions: Series "ACQ", double-acting, Ø 12 – 100

Papildoma informacija

Important: The scope of supply does not include a connector. Please order separately.
Other piston-Ø and stroke versions available on request.

Prekė

Pavadinimas	Stūmoklio Ø	Eiga (mm)	Gaminio forma	Stūmoklio koto Ø (mm)	Stūmoklio koto vidaus sriegiai
K- 07 15 12 15	12 mm	5	1	6	M 3 x 0.5
K- 07 15 12 16	12 mm	10	1	6	M 3 x 0.5
K- 07 15 12 17	12 mm	20	1	6	M 3 x 0.5
K- 07 15 12 18	12 mm	25	1	6	M 3 x 0.5
K- 07 15 12 19	12 mm	30	1	6	M 3 x 0.5
K- 07 15 12 20	12 mm	35	1	6	M 3 x 0.5
K- 07 15 12 21	12 mm	40	1	6	M 3 x 0.5
K- 07 15 12 22	12 mm	45	1	6	M 3 x 0.5
K- 07 15 12 23	12 mm	50	1	6	M 3 x 0.5
K- 07 15 12 24	16 mm	5	1	8	M 4 x 0.7
K- 07 15 12 25	16 mm	10	1	8	M 4 x 0.7
K- 07 15 12 26	16 mm	20	1	8	M 4 x 0.7
K- 07 15 12 27	16 mm	25	1	8	M 4 x 0.7
K- 07 15 12 28	16 mm	30	1	8	M 4 x 0.7
K- 07 15 12 29	16 mm	35	1	8	M 4 x 0.7
K- 07 15 12 30	16 mm	40	1	8	M 4 x 0.7
K- 07 15 12 31	16 mm	45	1	8	M 4 x 0.7
K- 07 15 12 32	16 mm	50	1	8	M 4 x 0.7
K- 07 15 12 33	16 mm	55	1	8	M 4 x 0.7
K- 07 15 12 34	16 mm	60	1	8	M 4 x 0.7
K- 07 15 12 35	20 mm	5	2	10	M 5 x 0.8
K- 07 15 12 36	20 mm	10	2	10	M 5 x 0.8
K- 07 15 12 37	20 mm	20	2	10	M 5 x 0.8
K- 07 15 12 38	20 mm	25	2	10	M 5 x 0.8
K- 07 15 12 39	20 mm	30	2	10	M 5 x 0.8
K- 07 15 12 40	20 mm	35	2	10	M 5 x 0.8
K- 07 15 12 41	20 mm	40	2	10	M 5 x 0.8
K- 07 15 12 42	20 mm	45	2	10	M 5 x 0.8
K- 07 15 12 43	20 mm	50	2	10	M 5 x 0.8
K- 07 15 12 44	20 mm	55	2	10	M 5 x 0.8
K- 07 15 12 45	20 mm	60	2	10	M 5 x 0.8
K- 07 15 12 46	20 mm	70	2	10	M 5 x 0.8
K- 07 15 12 47	20 mm	75	2	10	M 5 x 0.8
K- 07 15 12 48	20 mm	80	2	10	M 5 x 0.8

Nepaisant kruopštaus patikrinimo, negalime atmesti klaidų tikimybės, todėl už esamus duomenis neatsakome.

K-KURZH ZYL DOPPELW IG ASQ

Short-stroke cylinders, double-acting, with magnet, non-cushioned, with female thread, »ACQ« Series

HANSA FLEX

Prekė

Pavadinimas	Stūmoklio Ø	Eiga (mm)	Gaminio forma	Stūmoklio koto Ø (mm)	Stūmoklio koto vidaus sriegiai
K- 07 15 12 49	25 mm	5	2	12	M 6 x 1
K- 07 15 12 50	25 mm	10	2	12	M 6 x 1
K- 07 15 12 51	25 mm	20	2	12	M 6 x 1
K- 07 15 12 52	25 mm	25	2	12	M 6 x 1
K- 07 15 12 53	25 mm	30	2	12	M 6 x 1
K- 07 15 12 54	25 mm	35	2	12	M 6 x 1
K- 07 15 12 55	25 mm	40	2	12	M 6 x 1
K- 07 15 12 56	25 mm	45	2	12	M 6 x 1
K- 07 15 12 57	25 mm	50	2	12	M 6 x 1
K- 07 15 12 58	25 mm	55	2	12	M 6 x 1
K- 07 15 12 59	25 mm	60	2	12	M 6 x 1
K- 07 15 12 60	25 mm	70	2	12	M 6 x 1
K- 07 15 12 61	25 mm	75	2	12	M 6 x 1
K- 07 15 12 62	25 mm	80	2	12	M 6 x 1
K- 07 15 12 63	32 mm	5	3	16	M 8 x 1.25
K- 07 15 12 64	32 mm	10	3	16	M 8 x 1.25
K- 07 15 12 65	32 mm	20	3	16	M 8 x 1.25
K- 07 15 12 66	32 mm	25	3	16	M 8 x 1.25
K- 07 15 12 67	32 mm	30	3	16	M 8 x 1.25
K- 07 15 12 68	32 mm	35	3	16	M 8 x 1.25
K- 07 15 12 69	32 mm	40	3	16	M 8 x 1.25
K- 07 15 12 70	32 mm	45	3	16	M 8 x 1.25
K- 07 15 12 71	32 mm	50	3	16	M 8 x 1.25
K- 07 15 12 72	32 mm	55	3	16	M 8 x 1.25
K- 07 15 12 73	32 mm	60	3	16	M 8 x 1.25
K- 07 15 12 74	32 mm	70	3	16	M 8 x 1.25
K- 07 15 12 75	32 mm	75	3	16	M 8 x 1.25
K- 07 15 12 76	32 mm	80	3	16	M 8 x 1.25
K- 07 15 12 77	40 mm	5	3	16	M 8 x 1.25
K- 07 15 12 78	40 mm	10	3	16	M 8 x 1.25
K- 07 15 12 79	40 mm	20	3	16	M 8 x 1.25
K- 07 15 12 80	40 mm	25	3	16	M 8 x 1.25
K- 07 15 12 81	40 mm	30	3	16	M 8 x 1.25
K- 07 15 12 82	40 mm	35	3	16	M 8 x 1.25
K- 07 15 12 83	40 mm	40	3	16	M 8 x 1.25
K- 07 15 12 84	40 mm	45	3	16	M 8 x 1.25
K- 07 15 12 85	40 mm	50	3	16	M 8 x 1.25
K- 07 15 12 86	40 mm	55	3	16	M 8 x 1.25
K- 07 15 12 87	40 mm	60	3	16	M 8 x 1.25
K- 07 15 12 88	40 mm	70	3	16	M 8 x 1.25
K- 07 15 12 89	40 mm	75	3	16	M 8 x 1.25
K- 07 15 12 90	40 mm	80	3	16	M 8 x 1.25
K- 07 15 12 91	50 mm	5	3	20	M 10 x 1.5
K- 07 15 12 92	50 mm	10	3	20	M 10 x 1.5
K- 07 15 12 93	50 mm	20	3	20	M 10 x 1.5
K- 07 15 12 94	50 mm	25	3	20	M 10 x 1.5
K- 07 15 12 95	50 mm	30	3	20	M 10 x 1.5
K- 07 15 12 96	50 mm	35	3	20	M 10 x 1.5
K- 07 15 12 97	50 mm	40	3	20	M 10 x 1.5
K- 07 15 12 98	50 mm	45	3	20	M 10 x 1.5
K- 07 15 12 99	50 mm	50	3	20	M 10 x 1.5
K- 07 15 13 00	50 mm	55	3	20	M 10 x 1.5
K- 07 15 13 01	50 mm	60	3	20	M 10 x 1.5
K- 07 15 13 02	50 mm	70	3	20	M 10 x 1.5
K- 07 15 13 03	50 mm	75	3	20	M 10 x 1.5
K- 07 15 13 04	50 mm	80	3	20	M 10 x 1.5
K- 07 15 13 05	63 mm	5	3	20	M 10 x 1.5
K- 07 15 13 06	63 mm	10	3	20	M 10 x 1.5
K- 07 15 13 07	63 mm	20	3	20	M 10 x 1.5
K- 07 15 13 08	63 mm	25	3	20	M 10 x 1.5
K- 07 15 13 09	63 mm	30	3	20	M 10 x 1.5
K- 07 15 13 10	63 mm	35	3	20	M 10 x 1.5

K-KURZH ZYL DOPPELW IG ASQ

Short-stroke cylinders, double-acting, with magnet, non-cushioned, with female thread, »ACQ« Series

HANSA-FLEX

Prekė

Pavadinimas	Stūmoklio Ø	Eiga (mm)	Gaminio forma	Stūmoklio koto Ø (mm)	Stūmoklio koto vidaus sriegiai
K- 07 15 13 11	63 mm	40	3	20	M 10 x 1.5
K- 07 15 13 12	63 mm	45	3	20	M 10 x 1.5
K- 07 15 13 13	63 mm	50	3	20	M 10 x 1.5
K- 07 15 13 14	63 mm	55	3	20	M 10 x 1.5
K- 07 15 13 15	63 mm	60	3	20	M 10 x 1.5
K- 07 15 13 16	63 mm	70	3	20	M 10 x 1.5
K- 07 15 13 17	63 mm	75	3	20	M 10 x 1.5
K- 07 15 13 18	63 mm	80	3	20	M 10 x 1.5
K- 07 15 13 19	80 mm	5	3	25	M 16 x 2
K- 07 15 13 20	80 mm	10	3	25	M 16 x 2
K- 07 15 13 21	80 mm	20	3	25	M 16 x 2
K- 07 15 13 22	80 mm	25	3	25	M 16 x 2
K- 07 15 13 23	80 mm	30	3	25	M 16 x 2
K- 07 15 13 24	80 mm	35	3	25	M 16 x 2
K- 07 15 13 25	80 mm	40	3	25	M 16 x 2
K- 07 15 13 26	80 mm	45	3	25	M 16 x 2
K- 07 15 13 27	80 mm	50	3	25	M 16 x 2
K- 07 15 13 28	80 mm	55	3	25	M 16 x 2
K- 07 15 13 29	80 mm	60	3	25	M 16 x 2
K- 07 15 13 30	80 mm	70	3	25	M 16 x 2
K- 07 15 13 31	80 mm	75	3	25	M 16 x 2
K- 07 15 13 32	80 mm	80	3	25	M 16 x 2
K- 07 15 12 01	100 mm	5	3	32	M 20 x 2.5
K- 07 15 12 02	100 mm	10	3	32	M 20 x 2.5
K- 07 15 12 03	100 mm	20	3	32	M 20 x 2.5
K- 07 15 12 04	100 mm	25	3	32	M 20 x 2.5
K- 07 15 12 05	100 mm	30	3	32	M 20 x 2.5
K- 07 15 12 06	100 mm	35	3	32	M 20 x 2.5
K- 07 15 12 07	100 mm	40	3	32	M 20 x 2.5
K- 07 15 12 08	100 mm	45	3	32	M 20 x 2.5
K- 07 15 12 09	100 mm	50	3	32	M 20 x 2.5
K- 07 15 12 10	100 mm	55	3	32	M 20 x 2.5
K- 07 15 12 11	100 mm	60	3	32	M 20 x 2.5
K- 07 15 12 12	100 mm	70	3	32	M 20 x 2.5
K- 07 15 12 13	100 mm	75	3	32	M 20 x 2.5
K- 07 15 12 14	100 mm	80	3	32	M 20 x 2.5

Priedai

K-FUSSBEFESTIGUNG TYP LB 3	Foot model, »LB« type
K-FLANSCHBEFESTIGUNG TYP FA2	Flange model, »FA« type
K-SCHWENKGABELBEFESTIG CB 1	Female hinge model, »CB« type
K-GABELKOEPFE TYP Y SET 1	Fork model, »Y« type (incl. threaded adapter)
K-GELENKAUGEN TYP UNIT SET 1	Rod eye model, »UNIT« type (incl. threaded adapter)
K-SENSOREN CS1 KH MIT STECKER	Sensors »CS1« type, cable with M8 plug
K-SENSOREN CS1 KH OHNE STECKER	Sensors »CS1« type, cable without plug

Nepaisant kruopštaus patikrinimo, negalime atmesti klaidų tikimybės, todėl už esamus duomenis neatsakome.