K-RUNDZYLINDER DOPP O E D MI


Round cylinders, double-acting, with magnet, non-cushioned, »MI« Series

HANSA-FLEX

Savybės

Medžiagos	Filtered, unlubricated or lubricated compressed air. If lubrication is used, it must be continuous.
Darbinis slėgis	1 - 10 bar (double-acting); 2 - 10 bar (single-acting)
Temperatūros diapazonas	-20 °C to +70 °C
Stūmoklio kotas	Stainless steel 1.4301
Konstrukcija	Type "CA" = ground cover with threaded pin - swivel design Type "CM" = ground cover with threaded pin round - swivel design
Stūmoklis	Stainless steel 1.4305 (8 to 12 mm); Alu (16 to 40 mm)
Sandarinimo medžiaga	NBR
Cilindrinis vamzdis	Stainless steel 1.4301



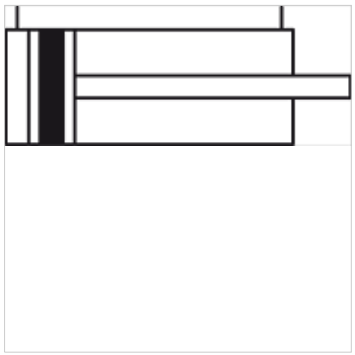

Nuoroda

Daugiau duomenų pagal užklausimą.

Aprašas

Circular cylinder in stainless steel in different versions: Series "MI" double-acting, Ø 8 – 25 in accordance with ISO 6432
Series "MI" double-acting, Ø 32 - 40

Prekė

Pavadinimas	Stūmoklio Ø	Eiga (mm)	Konstrukcija	Stūmoklio koto Ø (mm)	Stūmoklio koto išoriniai sriegiai
K- 07 15 17 90	8 mm	10	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 17 91	8 mm	15	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 17 92	8 mm	20	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 17 93	8 mm	25	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 17 94	8 mm	30	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 17 95	8 mm	40	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 17 96	8 mm	50	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 17 97	8 mm	60	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 17 98	8 mm	75	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 17 99	8 mm	80	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 00	8 mm	100	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 01	8 mm	125	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 02	8 mm	150	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 03	10 mm	10	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 04	10 mm	15	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 05	10 mm	20	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 06	10 mm	25	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 07	10 mm	30	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 08	10 mm	40	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 09	10 mm	50	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 10	10 mm	60	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 11	10 mm	75	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 12	10 mm	80	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 13	10 mm	100	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 14	10 mm	125	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 15	10 mm	150	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 16	10 mm	160	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 17	10 mm	175	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 18	10 mm	200	»CA« type, acc. to ISO 6432	4	M 4 x 0.7
K- 07 15 18 19	12 mm	10	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 20	12 mm	15	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 21	12 mm	20	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 22	12 mm	25	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 23	12 mm	30	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 24	12 mm	40	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 25	12 mm	50	»CA« type, acc. to ISO 6432	6	M 6 x 1

Nepaisant kruopštaus patikrinimo, negalime atmesti klaidų tikimybės, todėl už esamus duomenis neatsakome.

K-RUNDZYLINDER DOPP O E D MI

Round cylinders, double-acting, with magnet, non-cushioned, »MI« Series

HANSA-FLEX

Prekė

Pavadinimas	Stūmoklio Ø	Eiga (mm)	Konstrukcija	Stūmoklio koto Ø (mm)	Stūmoklio koto išoriniai sriegiai
K- 07 15 18 26	12 mm	60	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 27	12 mm	75	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 28	12 mm	80	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 29	12 mm	100	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 30	12 mm	125	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 31	12 mm	150	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 32	12 mm	160	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 33	12 mm	175	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 34	12 mm	200	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 35	12 mm	250	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 36	16 mm	10	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 37	16 mm	15	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 38	16 mm	20	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 39	16 mm	25	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 40	16 mm	30	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 41	16 mm	40	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 42	16 mm	50	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 43	16 mm	60	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 44	16 mm	75	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 45	16 mm	80	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 46	16 mm	100	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 47	16 mm	125	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 48	16 mm	150	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 49	16 mm	160	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 50	16 mm	175	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 51	16 mm	200	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 52	16 mm	250	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 53	16 mm	300	»CA« type, acc. to ISO 6432	6	M 6 x 1
K- 07 15 18 54	20 mm	10	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 55	20 mm	15	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 56	20 mm	20	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 57	20 mm	25	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 58	20 mm	30	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 59	20 mm	40	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 60	20 mm	50	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 61	20 mm	60	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 62	20 mm	75	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 63	20 mm	80	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 64	20 mm	100	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 65	20 mm	125	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 66	20 mm	150	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 67	20 mm	160	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 68	20 mm	175	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 69	20 mm	200	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 70	20 mm	250	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 71	20 mm	300	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 72	20 mm	350	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 73	20 mm	400	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 74	20 mm	450	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 75	20 mm	500	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 76	20 mm	600	»CA« type, acc. to ISO 6432	8	M 8 x 1.25
K- 07 15 18 77	25 mm	10	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 78	25 mm	15	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 79	25 mm	20	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 80	25 mm	25	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 81	25 mm	30	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 82	25 mm	40	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 83	25 mm	50	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 84	25 mm	60	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 85	25 mm	75	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 86	25 mm	80	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 87	25 mm	100	»CA« type, acc. to ISO 6432	10	M 10 x 1.25

K-RUNDZYLINDER DOPP O E D MI

Round cylinders, double-acting, with magnet, non-cushioned, »MI« Series

HANSA-FLEX

Prekė

Pavadinimas	Stūmoklio Ø	Eiga (mm)	Konstrukcija	Stūmoklio koto Ø (mm)	Stūmoklio koto išoriniai sriegiai
K- 07 15 18 88	25 mm	125	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 89	25 mm	150	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 90	25 mm	160	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 91	25 mm	175	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 92	25 mm	200	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 93	25 mm	250	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 94	25 mm	300	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 95	25 mm	350	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 96	25 mm	400	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 97	25 mm	450	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 98	25 mm	500	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 18 99	25 mm	600	»CA« type, acc. to ISO 6432	10	M 10 x 1.25
K- 07 15 19 00	32 mm	10	»CM« type	12	M 10 x 1.25
K- 07 15 19 01	32 mm	15	»CM« type	12	M 10 x 1.25
K- 07 15 19 02	32 mm	20	»CM« type	12	M 10 x 1.25
K- 07 15 19 03	32 mm	25	»CM« type	12	M 10 x 1.25
K- 07 15 19 04	32 mm	30	»CM« type	12	M 10 x 1.25
K- 07 15 19 05	32 mm	40	»CM« type	12	M 10 x 1.25
K- 07 15 19 06	32 mm	50	»CM« type	12	M 10 x 1.25
K- 07 15 19 07	32 mm	60	»CM« type	12	M 10 x 1.25
K- 07 15 19 08	32 mm	75	»CM« type	12	M 10 x 1.25
K- 07 15 19 09	32 mm	80	»CM« type	12	M 10 x 1.25
K- 07 15 19 10	32 mm	100	»CM« type	12	M 10 x 1.25
K- 07 15 19 11	32 mm	125	»CM« type	12	M 10 x 1.25
K- 07 15 19 12	32 mm	150	»CM« type	12	M 10 x 1.25
K- 07 15 19 13	32 mm	160	»CM« type	12	M 10 x 1.25
K- 07 15 19 14	32 mm	175	»CM« type	12	M 10 x 1.25
K- 07 15 19 15	32 mm	200	»CM« type	12	M 10 x 1.25
K- 07 15 19 16	32 mm	250	»CM« type	12	M 10 x 1.25
K- 07 15 19 17	32 mm	300	»CM« type	12	M 10 x 1.25
K- 07 15 19 18	32 mm	350	»CM« type	12	M 10 x 1.25
K- 07 15 19 19	32 mm	400	»CM« type	12	M 10 x 1.25
K- 07 15 19 20	32 mm	450	»CM« type	12	M 10 x 1.25
K- 07 15 19 21	32 mm	500	»CM« type	12	M 10 x 1.25
K- 07 15 19 22	32 mm	600	»CM« type	12	M 10 x 1.25
K- 07 15 19 23	40 mm	10	»CM« type	16	M 12 x 1.25
K- 07 15 19 24	40 mm	15	»CM« type	16	M 12 x 1.25
K- 07 15 19 25	40 mm	20	»CM« type	16	M 12 x 1.25
K- 07 15 19 26	40 mm	25	»CM« type	16	M 12 x 1.25
K- 07 15 19 27	40 mm	30	»CM« type	16	M 12 x 1.25
K- 07 15 19 28	40 mm	40	»CM« type	16	M 12 x 1.25
K- 07 15 19 29	40 mm	50	»CM« type	16	M 12 x 1.25
K- 07 15 19 30	40 mm	60	»CM« type	16	M 12 x 1.25
K- 07 15 19 31	40 mm	75	»CM« type	16	M 12 x 1.25
K- 07 15 19 32	40 mm	80	»CM« type	16	M 12 x 1.25
K- 07 15 19 33	40 mm	100	»CM« type	16	M 12 x 1.25
K- 07 15 19 34	40 mm	125	»CM« type	16	M 12 x 1.25
K- 07 15 19 35	40 mm	150	»CM« type	16	M 12 x 1.25
K- 07 15 19 36	40 mm	160	»CM« type	16	M 12 x 1.25
K- 07 15 19 37	40 mm	175	»CM« type	16	M 12 x 1.25
K- 07 15 19 38	40 mm	200	»CM« type	16	M 12 x 1.25
K- 07 15 19 39	40 mm	250	»CM« type	16	M 12 x 1.25
K- 07 15 19 40	40 mm	300	»CM« type	16	M 12 x 1.25
K- 07 15 19 41	40 mm	350	»CM« type	16	M 12 x 1.25
K- 07 15 19 42	40 mm	400	»CM« type	16	M 12 x 1.25
K- 07 15 19 43	40 mm	450	»CM« type	16	M 12 x 1.25
K- 07 15 19 44	40 mm	500	»CM« type	16	M 12 x 1.25
K- 07 15 19 45	40 mm	600	»CM« type	16	M 12 x 1.25

Priedai

K-FUSSBEFESTIGUNG TYP LB 1	Foot model, »LB« type
K-FLANSCHBEFESTIGUNG TYP FA3	Flange model, »FA« type

Nepaisant kruopštaus patikrinimo, negalime atmesti klaidų tikimybės, todėl už esamus duomenis neatsakome.

Nepaisant kruopštaus patikrinimo, negalime atmesti klaidų tikimybės, todėl už esamus duomenis neatsakome.