



# K-XRD STECKANSCHLUSS Z GEW AGR OR

Straight non-return valves, flow direction from tube to port, parallel male thread with O-ring

**HANSA FLEX**

## Savybės

Darbinis slėgis	Max. 10 bar, vacuum
Taikymo sritys	Air, vacuum
rekomenduojamos žarnos	PU or PA (nylon)
Medžiagos	suslėgtas oras
Norma	M thread acc. to DIN 13-1, with O-Ring G thread acc. to DIN EN ISO 228-1, with O-Ring
Temperatūros diapazonas	0 °C to +60 °C
Sandarinimo paviršius	O-ring (NBR)
Medžiaga	Plastic, Nickel plated brass
Prispaudimo žiedas	Plastic

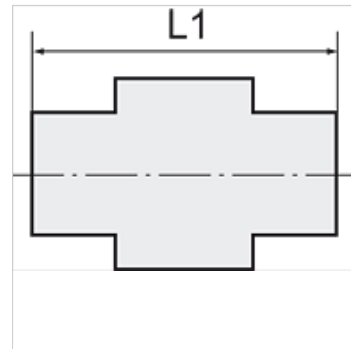

## Nuoroda

Daugiau duomenų pagal užklausimą.

## Aprašas

The non-return function of these push-in fittings prevents the air from flowing back. The unidirectional design means air flow is only possible in one direction. These valves are available with air flow from the port to the tube or from the tube to the port.

## Prekė

Pavadinimas	Sriegis	žarnos išoriniam Ø	L1 (mm)	Atidarymo slėgis (bar)	SW (rakto dydis)
K- 07 40 08 83	M 5	4 mm	31,0	0,2	10 mm
K- 07 40 08 78	G 1/8	4 mm	24,2	0,2	14 mm
K- 07 40 08 79	G 1/8	6 mm	31,0	0,2	14 mm
K- 07 40 08 80	G 1/8	8 mm	32,8	0,2	14 mm
K- 07 40 08 76	G 1/4	6 mm	33,0	0,2	17 mm
K- 07 40 08 77	G 1/4	8 mm	34,8	0,2	17 mm
K- 07 40 08 81	G 3/8	10 mm	41,0	0,2	20 mm
K- 07 40 08 82	G 3/8	12 mm	42,5	0,2	21 mm
K- 07 40 08 74	G 1/2	10 mm	43,0	0,2	24 mm
K- 07 40 08 75	G 1/2	12 mm	44,5	0,2	24 mm