



K-XRD STECKANSCHLUSS Z GEW AGR-K BE

Straight non-return valves, flow direction from tube to port, conical male thread, coated

HANSA FLEX

Savybės

Darbinis slėgis	Max. 10 bar, vacuum
Taikymo sritys	Air, vacuum
rekomenduojamos žarnos	PU or PA (nylon)
Medžiagos	suslėgtas oras
Norma	R thread acc. to ISO 7-1, thread coating
Temperatūros diapazonas	0 °C to +60 °C
Sandarinimo paviršius	Conical version: thread coating
Medžiaga	Plastic, Nickel plated brass
Prispaudimo žiedas	Plastic

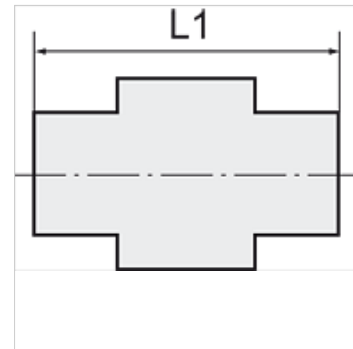

Nuoroda

Daugiau duomenų pagal užklausimą.

Aprašas

The non-return function of these push-in fittings prevents the air from flowing back. The unidirectional design means air flow is only possible in one direction. These valves are available with air flow from the port to the tube or from the tube to the port.

Prekė

Pavadinimas	Sriegis	žarnos išoriniam Ø	L1 (mm)	Atidarymo slėgis (bar)	SW (rakto dydis)
K- 07 40 08 97	R 1/8	4 mm	24,0	0,2	10 mm
K- 07 40 08 98	R 1/8	6 mm	31,0	0,2	12 mm
K- 07 40 08 99	R 1/8	8 mm	32,8	0,2	14 mm
K- 07 40 08 95	R 1/4	6 mm	33,0	0,2	14 mm
K- 07 40 08 96	R 1/4	8 mm	34,8	0,2	14 mm
K- 07 40 09 00	R 3/8	10 mm	41,0	0,2	17 mm
K- 07 40 09 01	R 3/8	12 mm	42,5	0,2	21 mm
K- 07 40 08 93	R 1/2	10 mm	43,0	0,2	21 mm
K- 07 40 08 94	R 1/2	12 mm	44,5	0,2	21 mm