


K-VERSCHLUSSKAPPEN 10 BAR

Hexagonal caps (pressure max. 10 bar)

HANSA FLEX

Savybės

| | |
|-------------------------|--|
| Darbinis slėgis | Max. 15 bar, coarse vacuum |
| Taikymo sritys | Air, vacuum |
| rekomenduojamos žarnos | PU or PA (nylon) |
| Medžiagos | Compressed air and all gases or liquids that are compatible with the materials |
| Temperatūros diapazonas | -20 °C to +80 °C |
| Sandarinimo paviršius | Parallel version: O-ring in housing, Conical version: thread coating |
| Medžiaga | Plastic, Nickel plated brass |
| Prispaudimo žiedas | Plastic |

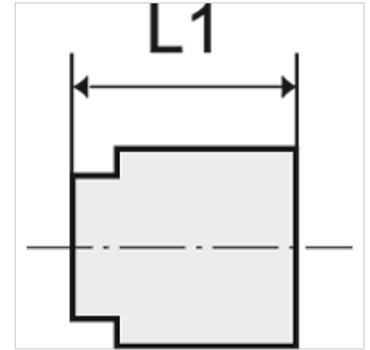

Nuoroda

Daugiau duomenų pagal užklausimą.

Aprašas

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

Prekė

| Pavadinimas | žarnos išoriniam Ø | L1 (mm) |
|----------------|--------------------|---------|
| K- 07 40 42 96 | 3 mm | 16,0 |
| K- 07 40 42 97 | 4 mm | 16,0 |
| K- 07 40 42 98 | 6 mm | 20,0 |
| K- 07 40 42 99 | 8 mm | 21,0 |
| K- 07 40 43 00 | 10 mm | 22,0 |
| K- 07 40 43 01 | 12 mm | 23,0 |
| K- 07 40 43 02 | 16 mm | 25,0 |